


Front



Back

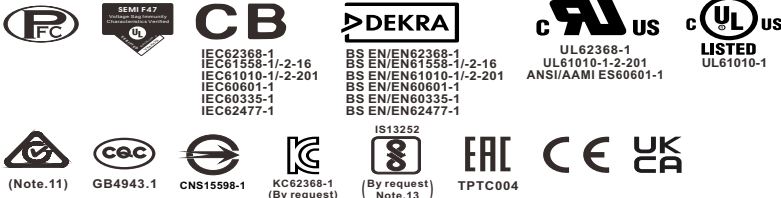

**Features**

- 85~305Vac input with PFC(277Vac available)
- Global certificates in multi-fields (ITE 62368-1, Medical 60601-1, Household 60335-1, Industrial 61558-1/2-16/61010-1/2-201, Energy converter 62477-1), SEMI F47 at 200Vac
- 200% peak power capability
- High efficiency up to 93%
- Output voltage 0~120% and output current 0~100% programmable
- Current sharing up to 9600W(3+1) for parallel use
- Built in ORing MOS By request, Order NO. : NSP-2400-xxOR/MODOR
- CANBus(Built in) or MODBus protocol (By request)
- -40~85°C wide range operation temperature(> +60°C derating)
- Extremely low leakage current<500uA, 2 x MOPP, suitable for BF medical applications
- Built-in constant current limiting circuit
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in remote ON/OFF control/Remote Sense/ DC OK signal
- Auxiliary 5Vdc and 12Vdc
- Over voltage category III (OVC III)
- Operating altitude up to 5000 meters
- Built-in intelligent fan speed control, low noise <46dB
- Conformal coating
- 5 years warranty

**Applications**

- Industrial automation machinery/ control system
- Security system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus
- Network equipment
- Telecom devices
- Power sourcing equipment of PoE
- Home automation
- Medical devices
- Supercapacitor

**GTIN CODE**


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

**Description**

The NSP-2400 series is a 2400W AC/DC power supply with PFC function, designed for high reliability and suitable for multiple industries. Key features include: compact size (325.8\*107\*41mm) for better space utilization in system installations, ultra-wide input range of 85~305Vac for global compatibility, up to 93% efficiency, programmable output voltage (0~120%) and current (0~100%), constant current design with 200% peak power capability, parallel output capacity up to 9600W, built-in CANBus communication interface, wide operating temperature range from -40 to +85°C (+60°C at full load), compliance with OVCIII, built-in Remote Control /Remote Sense/DC OK signal/auxiliary power, internal PCB coating, complete protections, certifications for multiple safety standards including 62368-1, 60601-1, 61558-1, 60335-1, 62477-1, and 61010-1, as well as 2 X MOPP compliance and extremely low leakage current (<500µA). It is suitable for BF-rated medical equipment and comes with a 5-years warranty, making it a highly cost-effective solution for industrial power supply needs.

**Model Encoding**

NSP - 2400 - 48 MOD

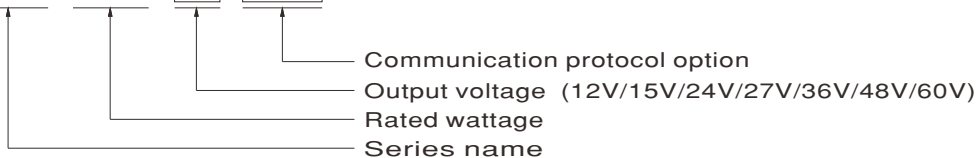


Type	Communication Protocol	Note
Blank	CANBus protocol	In Stock
MOD	MODBus protocol	By request

SPECIFICATION		NSP-2400-12	NSP-2400-15	NSP-2400-24	NSP-2400-27	NSP-2400-36	NSP-2400-48	NSP-2400-60	
		□ =Blank (standard model in stock), MOD (By request model)							
<b>OUTPUT</b>									
DC VOLTAGE		12V	15V	24V	27V	36V	48V	60V	
CURRENT		183.3A	146.7A	100A	88.8A	66.6A	50A	40A	
CURRENT RANGE		0 ~ 183.3A	0 ~ 146.7A	0 ~ 100A	0 ~ 88.8A	0 ~ 66.6A	0 ~ 50A	0 ~ 40A	
RATED POWER		2200W	2200W	2400W	2397W	2397W	2400W	2400W	
PEAK	Note.2	CURRENT	366.6A	293.3A	200A	177.6A	133A	100A	80A
		POWER	4400W	4400W	4800W	4795W	4795W	4800W	4800W
RIPPLE & NOISE (max.)	Note.3	300mVp-p	300mVp-p	300mVp-p	300mVp-p	350mVp-p	450mVp-p	600mVp-p	
VOLTAGE ADJ. RANGE		10.8 ~ 14.4V	13.5 ~ 19V	21.6 ~ 28.8V	24.3 ~ 32.4V	32.4 ~ 43.2V	43.2 ~ 55V	54 ~ 72V	
VOLTAGE TOLERANCE	Note.4	± 1.0%							
LINE REGULATION		± 0.5%							
LOAD REGULATION		± 0.5%							
SETUP, RISE TIME	Note.5	1800ms, 60ms/115Vac; 1800ms, 60ms/230Vac; 1800ms, 60ms/277Vac at full load							
HOLD UP TIME (Typ.)		12ms @ 70% load, 8ms @full load							
<b>INPUT</b>									
VOLTAGE RANGE	Note.6	85 ~ 305Vac	250 ~ 431Vdc						
FREQUENCY RANGE		47 ~ 63Hz							
POWER FACTOR (Typ.)		0.98/115Vac 0.95/230Vac 0.93/277Vac at full load							
EFFICIENCY (Typ.)		89%	90%	91%	91%	91.5%	92%	93%	
AC CURRENT (Typ.)		17A/115Vac	13A/230Vac	11A/277Vac					
INRUSH CURRENT (Typ.)		COLD START	30A/115Vac	60A/230Vac	75A/277Vac				
LEAKAGE CURRENT		Earth leakage current <500µA(rms)@277Vac ; Touch current<100µA(rms) @ 277Vac							
<b>PROTECTION</b>									
SHORT CIRCUIT	Note.7	PEAK POWER MODE	Constant current limiting, unit will shut down after 5 Sec, AC repower on to recover. (2 Sec for 12V/15V models)						
		CURRENT LIMITING MODE	Constant current limiting, recovers automatically after abnormal condition is removed						
OVERLOAD	Note.8	PEAK POWER MODE	From 105% to 200% of rated output power, unit will shut down after 5 seconds of continuous operation. AC repower on to recover. (2 Sec for 12V/15V models)						
			At >200% of rated output power, constant current limiting is activated. Unit will shut down after 5 seconds of continuous operation. AC repower on to recover. (2 Sec for 12V/15V models)						
		CURRENT LIMITING MODE	Constant current limiting, recovers automatically after abnormal condition is removed						
OVER VOLTAGE		15 ~ 19V	20 ~ 25V	29 ~ 37V	33 ~ 42V	44 ~ 54V	56 ~ 60V	73 ~ 86V	
		Protection type : Shut down and latch off output voltage, re-power on to recover							
OVER TEMPERATURE		Shut down output voltage, recovers automatically after temperature goes down							
<b>FUNCTION</b>									
OUTPUT CURRENT PROGRAMMABLE(PC)		Adjustment of constant current level is allowable between 0 ~ 100% of rated current. Please refer to the User Manual.							
OUTPUT VOLTAGE PROGRAMMABLE(PV)	Note.9	Adjustment of output voltage is allowable to 0 ~ 120% of nominal output voltage. Please refer to the User Manual.							
PARALLEL		Up to 9600W or (3+1) units. Please refer to the User Manual.							
AUXILIARY POWER		5Vaux @ 0.2A Tolerance ± 15%, ripple 150mVp-p							
		12Vaux @ 0.8A Tolerance ± 15%, ripple 450mVp-p							
REMOTE CONTROL		By electrical signal or dry contact Power ON: RC short Power OFF: RC open							
REMOTE SENSE		Compensate voltage drop on the load wiring up to 0.5Vdc							
DC OK SIGNAL		Contact rating(max.):5Vdc/10mA resistive load							
CANBus(BUILT-IN) or MODBus(By Request) INTERFACE		Communication provides functions such as control, setting and monitoring							
FAN NOISE (Typ.)	Note.10	Built-in intelligent fan speed control detect by PSU'S internal temperature							
		10% load with Ta=25℃	38dB						
		70% load with Ta=25℃	46dB	44dB	44dB	42dB	38dB	40dB	41dB
<b>ENVIRONMENT</b>									
WORKING TEMP.		-40 ~ +85℃ (Refer to "Derating Curve")							
WORKING HUMIDITY		20 ~ 90% RH non-condensing							
STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing							
TEMP. COEFFICIENT		± 0.03%/℃ (0 ~ 60℃)							
VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes							

SAFETY & EMC(Note 11~13)					
SAFETY STANDARDS	CB	IEC62368-1, IEC60335-1, IEC61558-1/-2-16, IEC61010-1/-2-201, IEC60601-1; IEC62477-1			
	DEKRA	BS EN/EN62368-1, BS EN/EN60335-1, BS EN/EN61558-1/-2-16, BS EN/EN61010-1/-2-201, BS EN/EN60601-1(3.2 Version);BS EN/EN62477-1			
	UL	UL62368-1, ANSI/AAMI ES60601-1(3.2 Version),UL61010-1/-2-201			
	CQC	GB4943.1			
	BSMI	CNS15598-1			
	EAC	TP TC 004			
	SEMI F47	approved			
	KC/BIS	KC 62368-1 and BIS IS 13252(Part 1) certified, No stock, contact sales by request			
ISOLATION LEVEL	Note.14	Primary-Secondary: 2xMOPP, Primary-Earth: 1xMOPP, Secondary-Earth: 1xMOPP			
OVER VOLTAGE CATEGORY	Note.15	IEC/EN 61558-1/-2-16	(OVC III, altitude up to 2000M)		
		IEC/EN/UL 62368-1	(OVC II, altitude up to 5000M)		
		IEC/EN 60335-1	(OVC II, altitude up to 5000M)		
		IEC/EN/ANSI/AAMI ES60601-1	(OVC II, altitude up to 4000M)		
		IEC/EN/UL 61010-1/-2-201	(OVC II, altitude up to 5000M)		
		IEC/EN 62477-1	(OVC II, altitude up to 5000M)		
SAFETY EXTRA-LOW VOLTAGE(SELV)		IEC/EN 61558-2-16 (SELV, 12 ~ 60V) IEC/EN 60335-1 (SELV, 12 ~ 36V) IEC/EN/UL 62368-1 (SELV/ES1, 12 ~ 48V)			
WITHSTAND VOLTAGE		I/P-O/P:4KVac I/P-FG:2KVac O/P-FG:1.5KVac			
ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH			
EMC EMISSION		<b>Parameter</b>	<b>Standard</b>	<b>Test Level / Note</b>	
		Conducted	BS EN/EN55032(CISPR32),CNS 15936,GB/T 9254.1,KS C 9832		Class B
			BS EN/EN55014-1(CISPR14-1)		
			BS EN/EN55011(CISPR11)		Class B
		Radiated	BS EN/EN55032(CISPR32),CNS 15936,GB/T 9254.1,KS C 9832		Class B
			BS EN/EN55014-1(CISPR14-1)		
			BS EN/EN55011(CISPR11)		Class B
Harmonic Current	BS EN/EN61000-3-2(IEC61000-3-2),GB 17625.1		Class A		
Voltage Flicker	BS EN/EN61000-3-3(IEC61000-3-3)		-----		
EMC IMMUNITY		BS EN/EN55035(CISPR35),BS EN/EN61000-6-2(IEC61000-6-2),BS EN/EN60601-1-2(IEC60601-1-2),BS EN/EN55014-2(CISPR14-2),KS C 9835,SEMI F47 tested at 200Vac			
		<b>Parameter</b>	<b>Standard</b>	<b>Test Level / Note</b>	
		ESD	BS EN/EN61000-4-2	Level 4, 15KV air ; Level 4, 8KV contact	
		Radiated	BS EN/EN61000-4-3	Level 3, 10V/m(80MHz~2.7GHz) Table 9, 9~28V/m(385MHz~5.78GHz)	
		EFT / Burst	BS EN/EN61000-4-4	Level 3, 2KV	
		Surge	BS EN/EN61000-4-5	Level 4, 2KV/Line-Line 4KV/Line-Earth	
		Conducted	BS EN/EN61000-4-6	Level 3, 10V	
		Magnetic Field	BS EN/EN61000-4-8	Level 4, 30A/m	
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods	
<b>OTHERS</b>					
MTBF	566.1K hrs min. Telcordia SR-332 (Bellcore) ; 47.3K hrs min. MIL-HDBK-217F (25°C)				
DIMENSION (L*W*H)	325.8*107*41mm				
PACKING	2.32Kg;4pcs/10.3Kg/1.09CUFT				
<b>NOTE</b>					
<ol style="list-style-type: none"> <li>All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature.</li> <li>The peak power duration is 2 seconds for 12V/15V models and 5 seconds for all other models.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF &amp; 47uF parallel capacitor.</li> <li>Tolerance: includes set up tolerance, line regulation and load regulation.</li> <li>Setup time is measured at the first cold start.</li> <li>Derating may be required at low input voltages; refer to the "Static Characteristics" section for details.</li> <li>Operation under stabilized output voltage may trigger protective shutdown.</li> <li>For details on the overload protection mode, refer to the "Overload Protection Mode" section in the User Manual.</li> <li>When the output voltage is adjusted via the PV function, the output ripple and noise may exceed the specified limits under certain operating conditions.</li> <li>Fan noise measurement is performed in accordance with ISO 7779.</li> <li>The Regulatory Compliance Mark (RCM) is applied on a voluntary basis. The equipment meets the relevant IEC or AS/NZS standards, or AS/NZS 3820 where applicable. The use of the RCM mark complies with AS/NZS 4417.1.</li> <li>The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a>)</li> <li>The BIS marking may not be available for certain manufacturing sites or models. Please contact your MEAN WELL sales rep for further information.</li> <li>MOPP is suitable for 100-240Vac input only.</li> <li>The ambient temperature derating of 3.5°C/1000m with fanless models and 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</li> </ol>					
※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>					


PFC fosc : 85KHz  
PWM fosc : 85KHz

**Block Diagram**

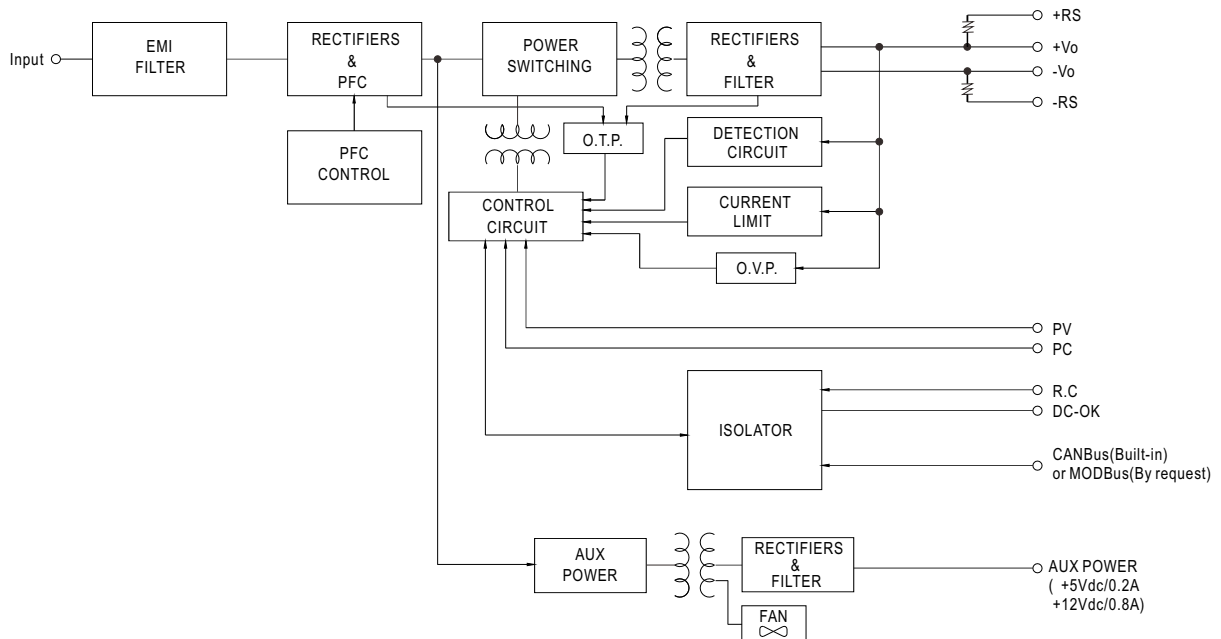


**Derating Curve**


◎ 12V/15V

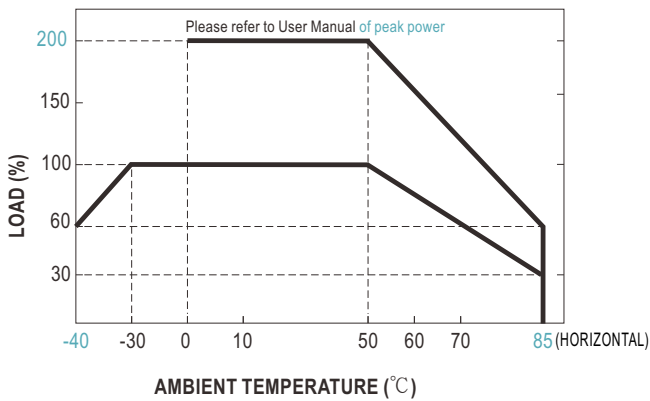


◎ Others

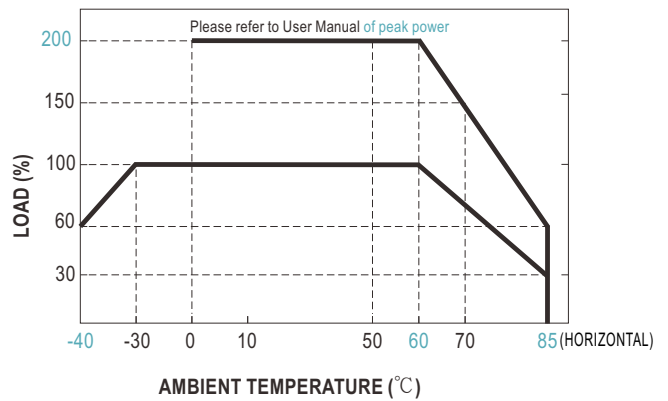

**Static Characteristics**

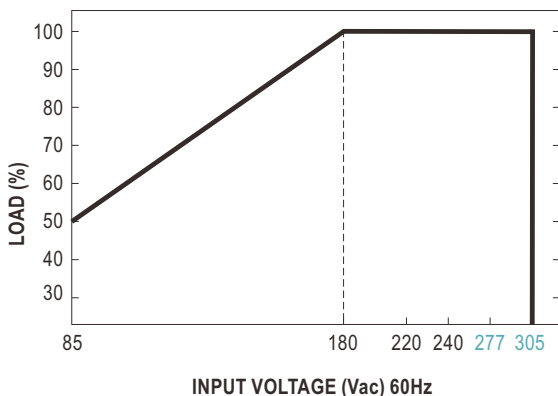

**Efficiency vs Load (48V Model)**

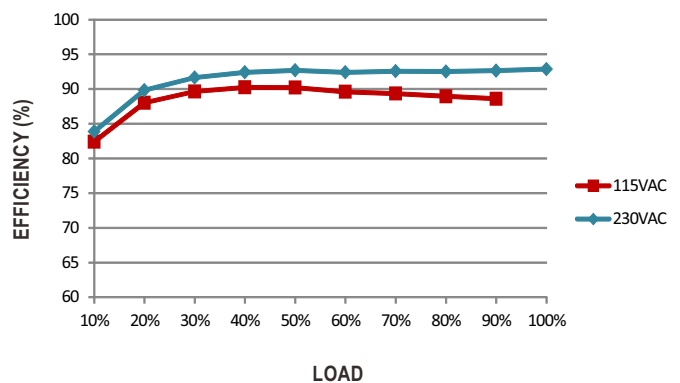

◎ The curve above is measured at 115/230Vac.


**User Manual**

**1. Peak Power**

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$Duty = \frac{t}{T} \times 100\% \leq 35\%$$

$$t \leq 5 \text{ sec}$$

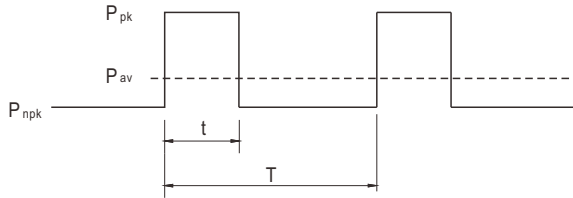

$P_{av}$  : Average output power(W)

$P_{pk}$  : Peak output power(W)

$P_{nPk}$  : Non-peak output power(W)

$P_{rated}$  : Rated output power(W)

$t$  : Peak power width(sec)


$T$  : Period(sec)

Note:


For 12V/15V models,  $t \leq 2 \text{ sec}$ .

For other models,  $t \leq 5 \text{ sec}$ .

**12V/15V**

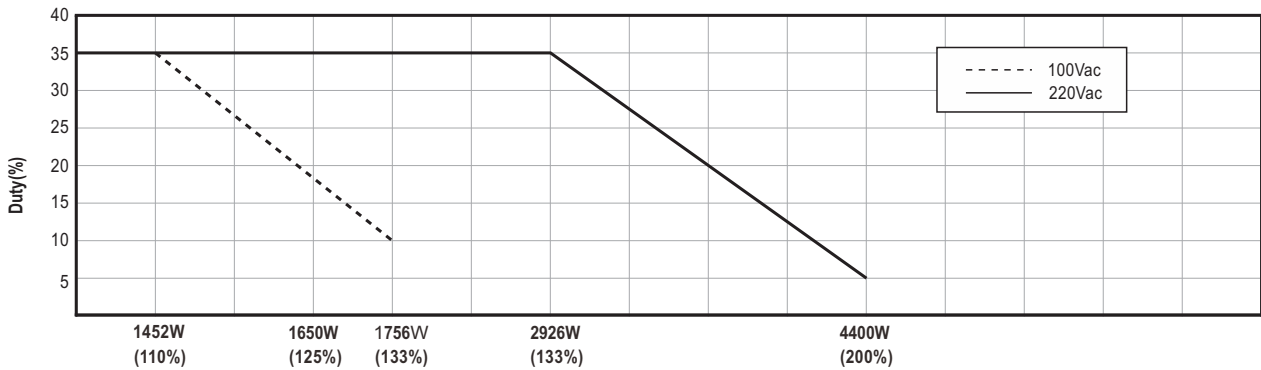

**Others**

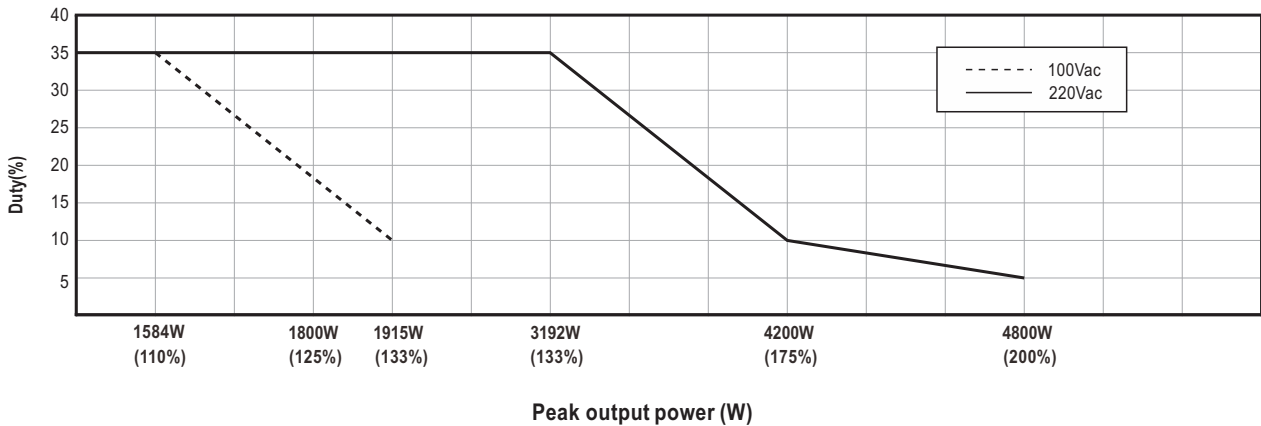

**For example (24V model)**

$V_{in}=220Vac$ , Duty\_max=5%

$P_{av}=P_{rated}=2400W$

$P_{pk}=4800W$

$t \leq 5sec$

$$T \geq \frac{5sec}{5\%} = 100sec$$

$$P_{nPk} \leq \frac{T \times P_{av} - t \times P_{pk}}{T-t} = 2273.8W$$

	12V/15V	Others
$P_{pk}$	4400W	4800W
$P_{av}$	1980W	2400W
Duty_max	5%	5%
$t$	$t \leq 2$	$t \leq 5$
$T$	$T \geq \frac{2sec}{5\%} = 40sec$	$T \geq \frac{5sec}{5\%} = 100sec$
$P_{nPk} \leq \frac{T \times P_{av} - t \times P_{pk}}{T-t}$	1853W	2274W

Note:

Input  $\geq 220 \text{ Vac}$ : Peak power = 2  $\times$  rated power


Input  $< 220 \text{ Vac}$ : Peak power = 1.33  $\times$  rated power

For 12V and 15V models, the average output power is limited to 90% of the rated output power.

### 2. Output Voltage Programming (P.V)




(1) Default by potentiometer (SVR)

- (a) Have the DIP switch position-3 set as
- (b) Output voltage can be trimmed by SVR.



(2) By Output Voltage Programming

- (a) Have the DIP switch position-3 set as
- (b) The output voltage can be trimmed to 0~120% by applying EXTERNAL VOLTAGE between PV and GND on CN1.

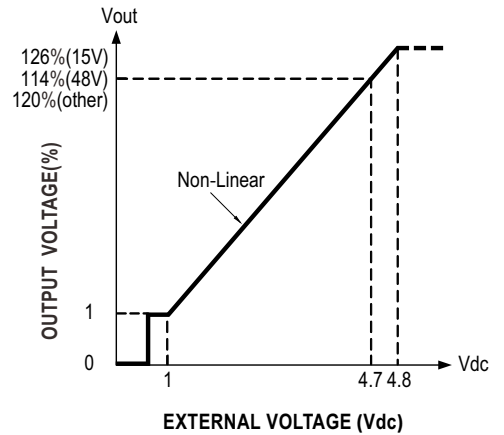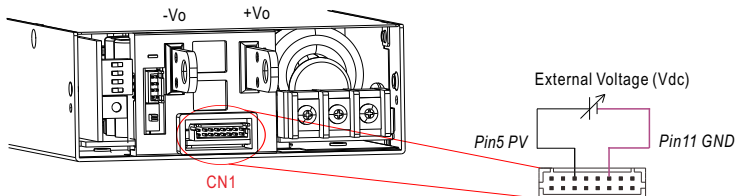

### 3. Output Current Programming (P.C)




(1) Default Overload Protection (OLP) value

- (a) Have the DIP switch position-2 set as
- (b) Output current is set default value.




(2) By Constant Current Level Programming

- (a) Have the DIP switch position-2 set as
- (b) The constant current level can be trimmed to 0~100% of the rated current by applying EXTERNAL VOLTAGE between PC and GND on CN1.

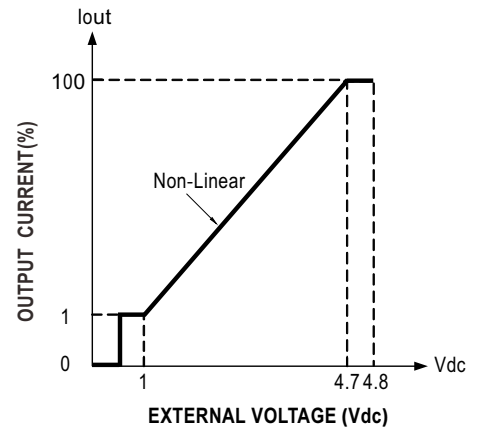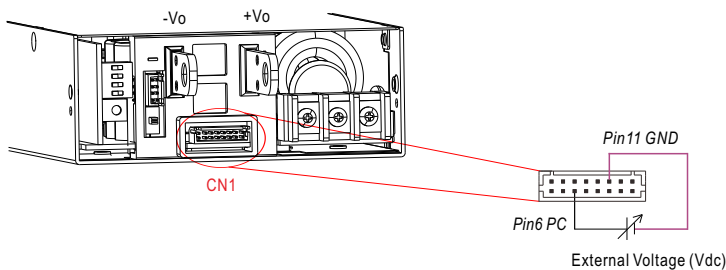


### 4. Remote Control

※ The power supply can be turned ON/OFF individually or along with other units by using the "Remote Control" function with external switch, photocoupler or relay.

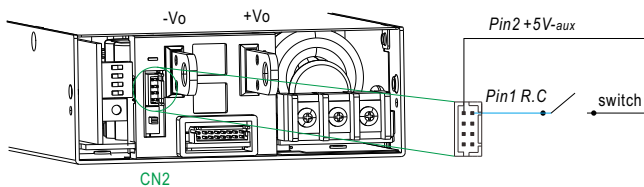


PSU Vo Status	Between +5V-aux(Pin 2) and R.C.(Pin 1)
Power ON	Switch Short
Power OFF	Switch Open

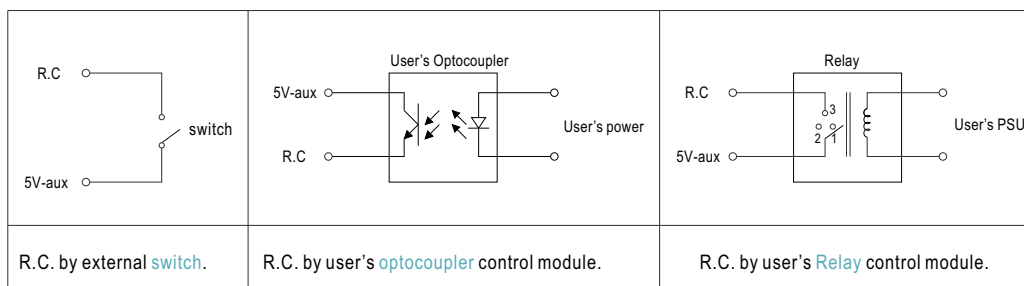

### 5. Remote Sense


※ The Remote Sense compensates voltage drop on the load wiring up to 0.5Vdc

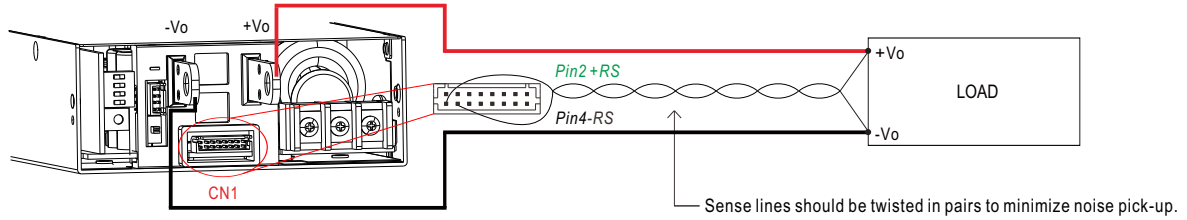

◎ The +RS signal should be connected to the positive terminal of the load whereas -RS signal to the negative terminal.

### 6. Local Sense

※ The +RS,-RS have to be connected to the +Vo(signal), -Vo(signal), respectively, as the following diagram, in order to get the correct output voltage if Remote Sense is not used.

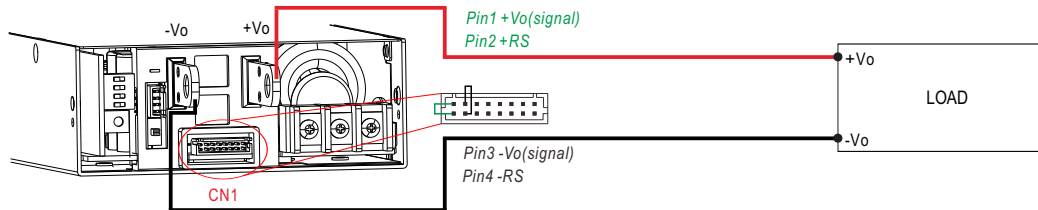

### 7. Parallel Function



NSP-2400 has the built-in active current sharing function and can be connected in parallel, up to 4 units, to provide higher output power as exhibited below :

- (1) The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- (2) Difference of output voltages among parallel units should be less than 0.2Vdc.
- (3) The total output current must not exceed the value determined by the following equation:  

$$\text{Maximum output current at parallel operation} = (\text{Rated current per unit}) \times (\text{Number of unit}) \times 0.9$$
- (4) Under parallel operation, the minimum output load should be greater than 5% of total output load; otherwise, it is likely that only one unit operates whereas other units may enter standby mode or their LED status indicators may not turn on.
- (5) When the total output current is less than 5% of the total rated current, or say  $(5\% \text{ of Rated current per unit}) \times (\text{Number of unit})$  the current shared among units may not be fully balanced.
- (6) For parallel operation, please contact MEAN WELL technical support if the output voltage is below 1.5V.
- (7) CN1/SW1 Function pin connection

Parallel	PSU1		PSU2		PSU3		PSU4	
	CN1	SW1 Pin4	CN1	SW1 Pin4	CN1	SW1 Pin4	CN1	SW1 Pin4
1 unit	X	ON	—	—	—	—	—	—
2 unit	✓	ON	✓	ON	—	—	—	—
3 unit	✓	ON	✓	—	✓	ON	—	—
4 unit	✓	ON	✓	—	✓	—	✓	ON

⊙ ✓ is CN1/DIP SW1 connected to plug pin, X is CN1/DIP SW1 not connected to plug pin.

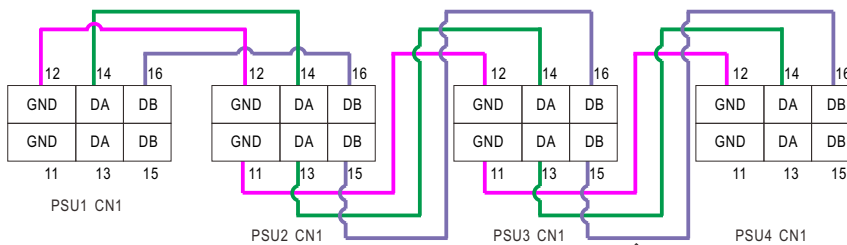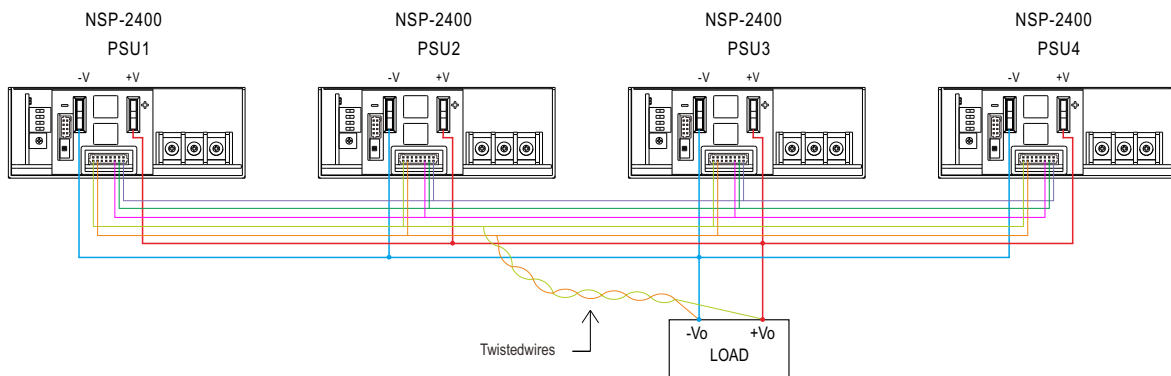

For longer CN1 cable lengths, twisted-pair wiring is recommended to minimize noise interference


◎ DA, DB and GND are connected mutually in parallel.

◎ DA, DB signal and parallel control function

(1) Non-parallel operation

(a) set the DIP switch of position-4 as



(b) By default, non-parallel operation.



(2) Default parallel operation

(a) set the DIP switch of position-4 as

(b) PSUs are configured in parallel operation.

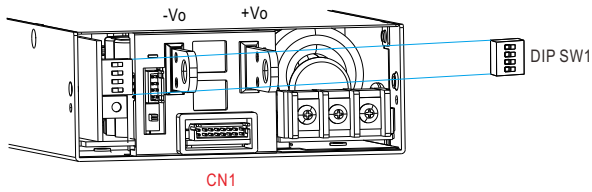


### 8. Overload Protection Mode

(1) Peak Power Mode

(a) Have the DIP switch position-1 as

(b) Limit current, shutdown after 5 or 2 seconds, recover after re-power on.


(c) Allow 1.33x or 2x peak power for 5 or 2 seconds.



(2) Current Limiting Mode

(a) Have the DIP switch position-1 as

(b) Limit current.



Note: With P.C function active, Peak Power Mode is disabled and the current limit defaults to the P.C setting

### 9. Support CANBus(Built-in) or MODBus Communication(By request)


※ Communication provides function such as control, setting and monitoring, Parameters include output power, input voltage, etc.

For more details, please refer to: <http://www.meanwell.com/manual.html>

**Mechanical Specification**

(Unit: mm , tolerance  $\pm 0.5\text{mm}$ )

Case No.294A

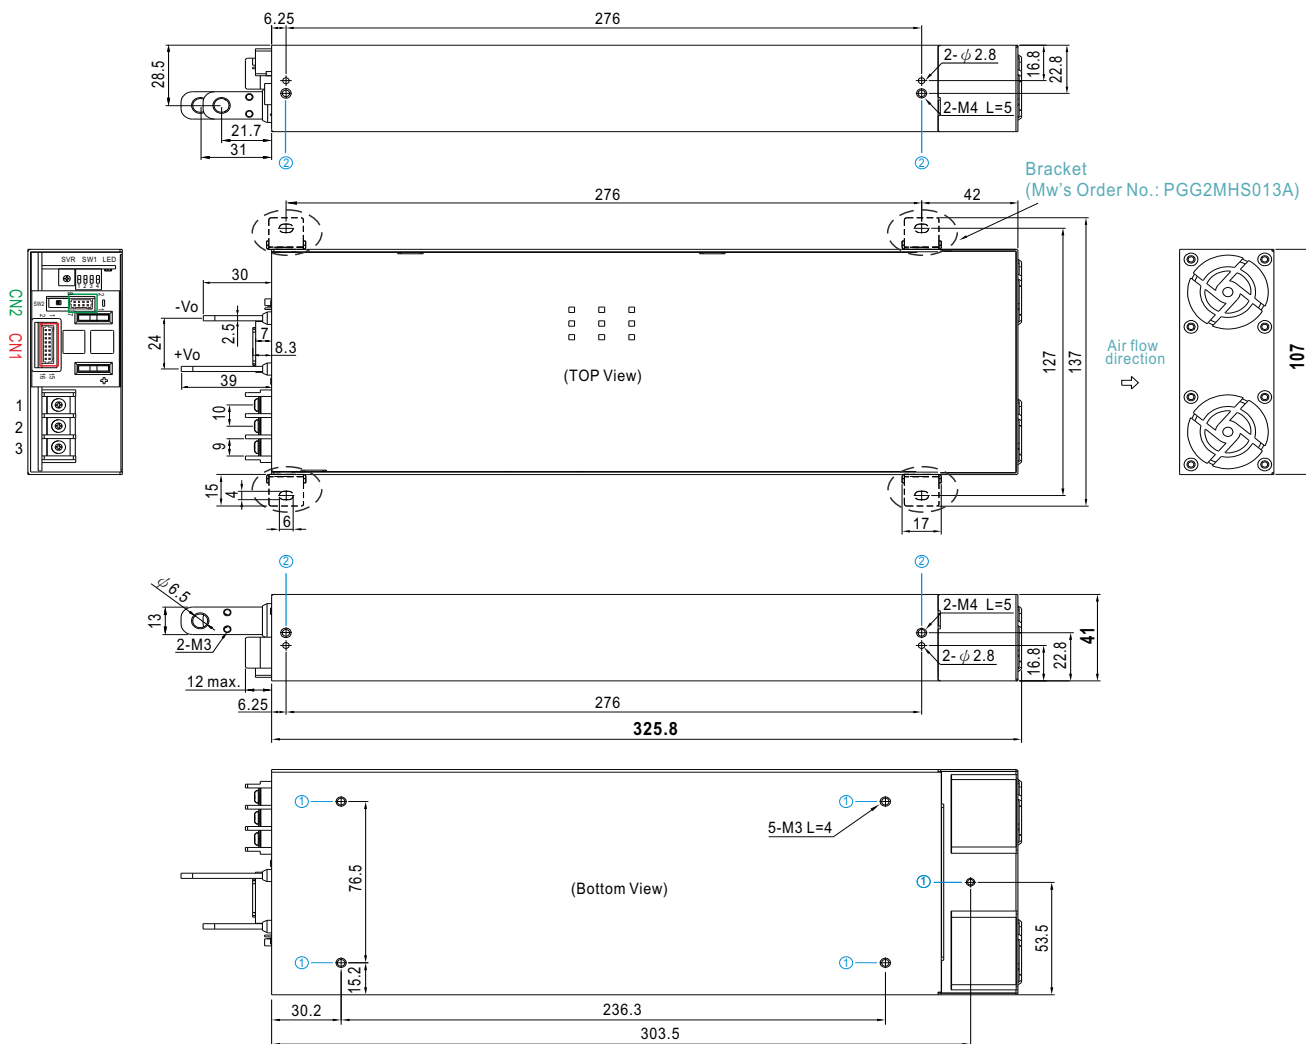


※ AC Input Terminal Pin No. Assignment


Pin No.	Assignment	Diagram	Screw Thread	Max. mounting torque
1	FG $\perp$		M3.5	8Kgf-cm
2	AC/N			
3	AC/L			

※ Mounting Instruction

Hole No.	Recommended Screw Size	MAX. Penetration Depth L	Recommended mounting torque
①	M3	4mm	6~8Kgf-cm
②	M4	5mm	7~10Kgf-cm

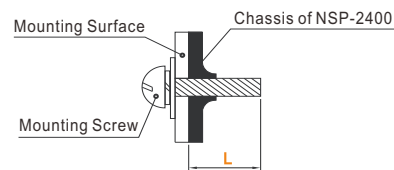

※ Control Pin No. Assignment (CN1) : HRS DF11-16DP-2DS or equivalent




Mating Housing	HRS DF11-16DS or equivalent
Terminal	HRS DF11-16SC or equivalent

Pin No.	Function	Description
1	+Vo (Signal)	Positive output voltage signal. It is for local sense; it cannot be connected directly to the load.
2	+RS	Positive sensing for remote sense.
3	-Vo (Signal)	Negative output voltage signal. It is for local sense and certain function reference; it cannot be connected directly to the load.
4	-RS	Negative sensing for remote sense.
5	PV	Connection for output voltage programming. (Note.1)
6	PC	Connection for constant current level programming. (Note.1)
7,8,9,10	A0,A1,A2,A3	Interface address lines. (Note.2)
11,12	GND	These pins connect to the negative terminal (-Vo).
13, 14	DA	Differential digital signal for parallel control.
15, 16	DB	Differential digital signal for parallel control.

Note1: Non-isolated signal, referenced to (GND).

Note2: Interface address setting, please refer to the user manual for more details.

※ Control Pin No. Assignment(CN2) : HRS DF11-08DP-2DS or equivalent



Mating Housing	HRS DF11-08DS or equivalent
Terminal	HRS DF11-08SC or equivalent

Pin No.	Function	Description
1	R.C	The unit can turn the output ON/OFF by electrical signal or dry contact between R.C and +5V-aux. (Note) Short (4.5 ~ 5.5Vdc) : Power ON ; Open (-0.5 ~ 0.5Vdc) : Power OFF ; The maximum input voltage is 5.5Vdc.
2	+5V-AUX	Auxiliary voltage output, 4.25~5.75Vdc, referenced to GND-aux. The maximum load current is 0.2A. This output has the built-in "Oring diodes" and is not controlled by "R.C"
3	DC-OK	High (3.5 ~ 5.5Vdc) : When the Vout $\leq 77\% \pm 5\%$ . Low (-0.5 ~ 0.5Vdc) : When Vout $\geq 80\% \pm 5\%$ . The maximum sourcing current is 10mA and only for output. (Note)
4,6	GND-AUX	Auxiliary voltage output GND. The signal return is isolated from the output terminals (+Vo & -Vo).
5	+12V-AUX	Auxiliary voltage output, 10.2~13.8Vdc, referenced to GND-aux. The maximum load current is 0.8A. This output has the built-in "Oring diodes" and is not controlled by "R.C".
7	D+	For MODBus model: Data line used in MODBus interface. (Note)
	CANH	For CANBus model: Data line used in CANBus interface. (Note)
8	D-	For MODBus model: Data line used in MODBus interface. (Note)
	CANL	For CANBus model: Data line used in CANBus interface. (Note)

Note: Isolated signal, referenced to GND-AUX.

※ DIP Switch Position Assignment(DIP-SW1): Please refer to the User Manual.

Pin No.	Assignment	Diagram
1	Overload(OLP) type select	
2	Output Current Programming (PC)	
3	Output Voltage Programming (PV)	
4	DA,DB Signal and paralld control function	

DIP-SW PIN1:OL\_SD  
DIP-SW PIN2:PC  
DIP-SW PIN3:PV  
DIP-SW PIN4:PRL

※ LED Status Indicators

Description	Output of alarm
Normal operation	Green : Steadily lit
Remote off	Red : Steadily lit
Internal over-temperature	Orange : 1 Blink/Pause
Overload / Short	Red : 1 Blink/Pause
Over voltage	Red : 2 Blink/Pause
Over temperature	Red : 3 Blink/Pause
Fan fail	Red : 4 Blink/Pause
AC under voltage	Red : 5 Blink/Pause
Others (Note)	Red : 6 Blink/Pause

Note: 1. Others include hardware fault etc

2. In Current Limiting mode, OLP operate in constant current limiting, with the indicator steadily lit green.

※ Control Pin Assignment SW2



Function	Description
ON	Termination resistors(120Ω). For CANBus/MODBus communication.
OFF	No need to communicate.

■ Accessory List

No.	Item	Quantity
1	Remote Sense(CN1) mating wire along with NSP-2400 (standard accessory)	1pcs/per model
2	Remote Control(CN2) mating wire along with NSP-2400 (standard accessory)	1pcs/per model
3	Bracket Mw's Order No.: PGG2MHS013A (Optional accessories can be purchased separately)	4pcs/per model (Please refer to Installation Diagram)
4	Terminal cover MW'S Order NO. :PEE4TBC-03-DG (Optional accessories can be purchased separately)	1pcs/per model

■ Installation Diagram

