



















Features














- 85~305Vac input with PFC(277Vac available)
- No load power consumption<0.75W by R.C.
- Global certificates in multi-fields (ITE 62368-1, Medical 60601-1, Household 60335-1, Industrial 61558-1/2-16/61010-1, Energy converter 62477-1)
- 200% peak power capability(12~60V models)
- High efficiency up to 95%
- -40~85℃ wide range operation temperature(> +60℃ derating) Power sourcing equipment of PoE
- Extremely low leakage current<350µA, 2 x MOPP. suitable for BF medical applications
- Built-in constant current limiting circuit
- · Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan with noise <45dB and fan ON/OFF control
- Built-in Remote ON/OFF control/Remote Sense/ DC OK signal
- Over voltage category III (OVC III)
- Operating altitude up to 5000 meters
- Conformal coating
- 5 years warranty

Description

The NSP-500 series is a 500W AC/DC power supply with PFC function, designed for high reliability and suitable for multiple industries. Key features include: compact size (199*99*41 mm) for better space utilization in system installations, ultra-wide input range of 85~305Vac for global compatibility, up to 95% efficiency and low standby power consumption (<0.75W) for energy-saving and carbon reduction, constant current design with 200% peak power capability, wide operating temperature range from -40 to +85°C (+60°C at full load), compliance with OVCIII, built-in Remote Control /Remote Sense/DC OK signal, internal PCB coating, complete protections, certifications for multiple safety standards including 62368-1, 60601-1, 61558-1, 60335-1, 62477-1, and 61010-1, as well as 2 X MOPP compliance and extremely low leakage current (<350μA). It is suitable for BF-rated medical equipment and comes with a 5-years warranty, making it a highly cost-effective solution for industrial power supply needs.

Model Encoding

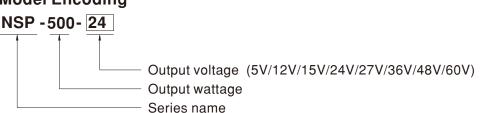























Applications

- Industrial automation machinery/ control system
- Security system
- Mechanical and electrical equipment
- · Electronic instruments, equipments orapparatus
- Network equipment
- Telecom devices
- Home automation
- Medical devices
- Charging application

MW Search: https://www.meanwell.com/serviceGTIN.aspx

GTIN CODE



A - 90A 0W	12V 42A 0 ~ 42A	15V 33.4A	24V	27V	36V	48V	
A - 90A 0W	42A	-	24V	27V	36V	40)/	1
A - 90A 0W	42A	-				140V	60V
0W	0 - 124	JJ. 4 /\	21A	18.6A	13.9A	10.5A	8.4A
-	U~4ZA	0 ~ 44.4A	0 ~ 21A	0 ~ 18.6A	0 ~ 13.9A	0 ~ 10.5A	0 ~ 8.4A
-	504W	501W	504W	502.2W	500.4W	504W	504W
	84A	66.7A	41.7A	37A	27.8A	20.8A	16.7A
A	1000W	1000W	1000W	1000W	1000W	1000W	1000W
	200mVp-p	200mVp-p	240mVp-p	240mVp-p	240mVp-p	240mVp-p	300mVp-p
7 ~ 5.5V	10.8 ~ 14V	15 ~ 19V	21 ~ 26V	26 ~ 32V	32 ~ 43V	44 ~ 57V	54 ~ 72V
	±2.0%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
							±0.5%
							±0.5%
					20.070	20.070	20.070
ms at full load	1000	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		, 001110/2177400			
~ 305Vac	120 ~ 431Vdc						
5W/115Vac	0.75W/230\	/ac 0.7	5W/277Vac				
3.3W/115Vac 3W/23UVac 3W/27/Vac 47 ~ 63Hz							
%				9.1%	0/1 5%	05%	95%
			3470	3470	34.070	3370	3070
i ii i ioanago oa	Tront Joseph (IIII	10/6/277 740, 104	on current room.	(11110) @ 217 vao			
5V Constant current limiting for more than 5 seconds (Vout<30%) and then hiccup mode, recovers automatically after faul condition is remove							
Constant current limiting for more than 5 seconds (Vout<30%) and then shut down o/p voltage, AC re-power on to recover							
	105%~150% rated output power; Constant current limiting for more than 5 seconds and then recovers automatically						
	Normally works within 105 ~ 200% rated output power for more than 5 seconds and then constant current limiting without shutdown(Vout>30%), recovers automatically after fault condition is removed, or shut down o/p voltage						
	>200% rated power, constant current limiting (Vout>30%) with auto-recovery after fault condition is removed,						d,
		1	1		I	T	
				33~ 42V	44 ~ 54V	58~ 70V	73~ 86V
ut down o/p vo	oitage, AC re-pov	ver on to recover					
WED ON: E	DC+~BC 0	-0.9\/do.or.onon					
WER OFF: F	RC+~RC- 3	3~10Vdc by eter	nal voltage				
Compensate voltage drop on the load wiring up to 0.3V. Please refer to the Function Manual							
By phototransistor contact rating(max.):15Vdc/10mA resistive load. Please refer to the Function Manual.							
Fan ON/OFF control, RTH3≥50°C ±10°C FAN ON; RTH3≤40°C ±10°C FAN OFF 45dB							
_10 ~ +85°C (Refer to "Derating Curve")							
•							
-40 ~ +85°C, 10 ~ 95% RH non-condensing							
±0.05%/°C (0 ~ 60°C) 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes							
.((0) m	0% 10ms, 80ms/1 ns at full load ~ 305Vac 5W/115Vac W/115Vac % A/115Vac LD START 2 th leakage cu / ~ 60V ~ 7.5V tection type: ut down o/p vo WER ON: F WER OFF: F mpensate volt phototransiste n ON/OFF cor 1B ~ +85°C (Rei ~ 90% RH noi	100% ±0.5% 100ms, 80ms/115Vac 1000 10ms, 80ms/115Vac 1000 10ms at full load 2005Vac 120 ~ 431Vdc 15W/115Vac 0.75W/230V 15W/115Vac 3W/231 20.98/115Vac, PF>0.93/230Vac 120 ~ 431Vdc 15W/115Vac 3W/231 20.98/115Vac, PF>0.93/230Vac 10.98/115Vac 2.6A/230Vac 10.98/115Vac 40/20 115Vac 2.6A/230Vac 10.98/20Wac	0% ±0.5% ±0.5% 10ms, 80ms/115Vac 1000ms, 80ms/230Vac ns at full load 2 305Vac 120 ~ 431Vdc 5 W/115Vac 0.75 W/230Vac 0.76 W/115Vac 3 W/230Vac 0.76 W/115Vac, PF>0.93/230Vac, PF>0.9/277Vac, 26A/230Vac 2.2A/277Vac LD START 20A/115Vac 40A/230Vac 50A/2 th leakage current <350μA(rms)@277Vac, touc constant current limiting for more than 105%~150% rated output power; after fault condition is removed Normally works within 105 ~ 200% without shutdown(Vout>30%), rewindown o/p voltage when Vout 15 ~ 19V 20 ~ 25V tection type: Shut down o/p voltage, AC re-power on 200% rated power, constant current than 105%~150% rated power, constant current or shut down o/p voltage when Vout 200% rated power, constant current or shut down o/p voltage, AC re-power on 200% rated power, constant current power on the load wiring up to 150 m on NOFF control, RTH3 ≥50 ℃ ±10 ℃ FAN On 16 m on NOFF control, RTH3 ≥ 50 ℃ ±10 ℃ FAN On 16 m on NOFF control, RTH3 ≥ 50 ℃ ±10 ℃ FAN On 16 m on NOFF control, RTH3 ≥	10ms, 80ms/115Vac 1000ms, 80ms/230Vac 900ms as at full load 305Vac 120 ~ 431Vdc 50W/115Vac 0.75W/230Vac 0.75W/277Vac W/115Vac 3W/230Vac 3W/277Vac 63Hz 20.98/115Vac, PF>0.93/230Vac, PF>0.9/277Vac at full load 6 92% 92% 94% A/115Vac 2.6A/230Vac 2.2A/277Vac LD START 20A/115Vac 40A/230Vac 50A/277Vac th leakage current <350μA(rms)@277Vac, touch current<100μA Constant current limiting for more than 5 seconds (Vout<30 or Hiccup mode, recovery automatically after fault condition is removed Normally works within 105 ~ 200% rated output powithout shutdown (Vout>30%, AC re-power on to recover 200% rated power, constant current limiting (Vout>30 or shut down o/p voltage when Vout<30%, AC re-power on to recover 200% rated power, constant current limiting (Vout>30 or shut down o/p voltage, AC re-power on to recover ut down o/p voltage, AC re-power on to recover ut down o/p voltage, AC re-power on to recover ut down o/p voltage, AC re-power on to recover ut down o/p voltage, AC re-power on to recover ut down o/p voltage drop on the load wiring up to 0.3V. Please refe phototransistor contact rating(max.):15Vdc/10mA resistive load. In ON/OFF control, RTH3 ≥50 ℃ ±10 ℃ FAN ON; RTH3 ≤40 ℃ 18B ~ +85°C (Refer to "Derating Curve") ~ 90% RH non-condensing	10ms, 80ms/115Vac 1000ms, 80ms/230Vac 900ms, 80ms/277Vac ns at full load -305Vac 120 ~ 431Vdc -305Vac 120 ~ 431Vdc -305Vac 3W/230Vac 0.75W/277Vac W/115Vac 3W/230Vac 3W/277Vac W/115Vac 3W/230Vac 3W/277Vac -63Hz -0.98/115Vac, PF>0.93/230Vac, PF>0.9/277Vac at full load -6 92% 92% 94% 94% 94% A/115Vac 2.6A/230Vac 2.2A/277Vac LD START 20A/115Vac 40A/230Vac 50A/277Vac th leakage current <350µA(rms)@277Vac, touch current<100µA(rms) @ 277Vac Constant current limiting for more than 5 seconds (Vout<30%) and then hiccup or Hiccup mode, recovery automatically after fault condition is removed Normally works within 105 ~ 200% rated output power for more than without shutdown (Vout>30%), recovers automatically after fault condition is removed Normally works within 105 ~ 200% rated output power for more than without shutdown (Vout>30%), recovers automatically after fault condition is removed Normally works within 105 ~ 200% rated output power for more than without shutdown (Vout>30%), recovers automatically after fault condition is removed Normally works within 105 ~ 200% rated output power for more than without shutdown (Vout>30%), recovers automatically after fault condition is removed Normally works within 105 ~ 200% rated output power for more than without shutdown (Vout>30%), recovers automatically after fault condition is removed Normally works within 105 ~ 200% rated output power for more than without shutdown (Vout>30%), recovers automatically after fault condition is removed Normally works within 105 ~ 200% rated output power for more than without shutdown (Vout>30%), recovers automatically after fault condition is removed Normally works within 105 ~ 200% rated output power for more than without shutdown (Vout>30%), recovers automatically after fault condition is removed Normally works within 105 ~ 200% rated output power for more than shutdown (Vout>30%), recovers automatically after fault condition is removed Normally works within 105 ~ 200% rated output power for more than shutdown (0% ±0.5% ±0.5% ±0.5% ±0.5% ±0.5% ±0.5% ±0.5% 10ms, 80ms/115Vac 1000ms, 80ms/230Vac 900ms, 80ms/277Vac as at full load 305Vac 120 ~ 431Vdc 5W/115Vac 0.75W/230Vac 0.75W/277Vac W/115Vac 3W/230Vac 3W/277Vac -63Hz -0.98/115Vac, PF>0.93/230Vac, PF>0.9/277Vac at full load 6 92% 92% 94% 94% 94% 94.5% A/115Vac 2.6A/230Vac 2.2A/277Vac LD START 20A/115Vac 40A/230Vac 50A/277Vac th leakage current <350µA(rms)@277Vac, touch current<100µA(rms) @ 277Vac Constant current limiting for more than 5 seconds (Vout<30%) and then shut down of p wor Hiccup mode, recovers automatically after fault condition is removed. Depends on the 105%~150% rated output power; Constant current limiting for more than 5 seconds and to without shutdown (Vout-30%), recovers automatically after fault condition is removed. Normally works within 105 ~ 200% rated output power for more than 5 seconds and to without shutdown (Vout-30%), recovers automatically after fault condition is removed. Normally works within 105 ~ 200% rated output power for more than 5 seconds and to without shutdown (Vout-30%), recovers automatically after fault condition is removed. Normally works within 105 ~ 200% rated output power for more than 5 seconds and to without shutdown (Vout-30%), recovers automatically after fault condition is removed. Normally works within 105 ~ 200% rated output power for more than 5 seconds and to without shutdown (Vout-30%), recovers automatically after fault condition is removed. Normally works within 105 ~ 200% rated output power for more than 5 seconds and to without shutdown (Vout-30%), recovers automatically after fault condition is removed. Normally works within 105 ~ 200% rated output power for more than 5 seconds and to without shutdown (Vout-30%), RC re-power on to recover. Normally works within 105 ~ 200% rated output power for more than 5 seconds and to without shutdown (Vout-30%), RC re-power for more than 5 seconds and to without shutdown (Vout-30%), RC re-power for more than 5 seconds and to without shutdown (Vout-30%), RC	10% ±0.5%



SPECIFICATION	NSP-500-5	NSP-500-12	NSP-500-15	NSP-500-24	NSP-500-27	NSP-500-36	NSP-500-48	NSP-500-60
SAFETY & EMC No	te 6							
SAFETY STANDARDS	CB IEC62368-1, IEC60335-1, IEC61558-1/-2-16, IEC61010-1/-2-201, IEC60601-1; IEC62477-1 DEKRA BS EN/EN62368-1, BS EN/EN60335-1, BS EN/EN61558-1/-2-16, BS EN/EN61010-1/-2-201, BS EN/EN60601-1(3.2 Version);BS EN/EN62477-1 UL UL62368-1, ANSI/AAMI ES60601-1(3.2 Version),UL61010-1/-2-201 RCM AS/NES 62368-1, AS/NES61558-1/-2-16 CCC GB4943.1 BSMI CNS15598-1,BIS IS13252(Part1): 2010/IEC 60950-1: 2005(except for 48V/60V) EAC TP TC 004 approved; KC KC62368-1 certified and BIS IS13252 (Part 1): 2010 certified, no, no stock, contact sale for inquires							
ISOLATION LEVEL N	lote 8 Primary-Second	dary: 2xMOPP, F	Primary-Earth: 1xN	OPP, Secondary	-Earth: 1xMOPP			
OVER VOLTAGE CATEGORY	IEC/EN/UL 623 IEC/EN 60335- IEC/EN 60601- IEC/EN 61010-	IEC/EN 61558-1/-2-16						
SAFETY EXTRA-LOW VOLTAGE(SELV)	IEC/EN 60335-	2-16 (SELV, 5 ~ ; 1 (SELV, 5 ~ 36V 68-1 (SELV/ES1	′) ´					
WITHSTAND VOLTAGE	I/P-O/P:4.2KVa	c I/P-FG:2.1K	Vac O/P-FG:1.5	iKVac				
ISOLATION RESISTANCE	I/P-O/P, I/P-FG	, O/P-FG:100M (Ohms / 500VDC / 2	25℃/ 70% RH				
	Parameter		Stan	dard		Test Level /	Test Level / Note	
		Conducted	BSE	N/EN55032(CISF	PR32),CNS 1593	6 Class B	Class B	
	Conducted		Conducted BS EN/EN55014-1(CISPR14-1)					
				N/EN55011(CISF	PR11)	Class B		
			BSE	N/EN55032(CISF	PR32),CNS 1593	NS 15936 Class B		
EMC EMISSION	Radiated		BSE	N/EN55014-1(CI	SPR14-1)			
				N/EN55011(CISF	PR11)	Class B		
	Harmonic Curr	Harmonic Current		BS EN/EN61000-3-2(IEC61000-3-2)		Class A	Class A	
	Voltage Flicker	Voltage Flicker		N/EN61000-3-3(IEC61000-3-3)			
		BS EN/EN55035(CISPR35),BS EN/EN61000-6-2(IEC61000-6-2),BS EN/EN60601-1-2(IEC60601-1-2), BS EN/EN55014-2(CISPR14-2)						
	Parameter	Parameter		Standard		Test Level /	Test Level / Note	
	ESD		BS E	BS EN/EN61000-4-2		Level 4, 15K	Level 4, 15KV air ; Level 4, 8KV contact	
	Radiated	Radiated		BS EN/EN61000-4-3			Level 3, 10V/m(80MHz~2.7GHz) Table 9, 9~28V/m(385MHz~5.78GHz)	
	EFT / Burst		BS E	BS EN/EN61000-4-4		Level 3, 2KV	Level 3, 2KV	
EMC IMMUNITY	Surge		BS E	BS EN/EN61000-4-5		Level 4, 2KV	Level 4, 2KV/Line-Line 4KV/Line-Earth	
	Conducted		BS E	BS EN/EN61000-4-6		Level 3, 10V	Level 3, 10V	
	Magnetic Field		BS E	BS EN/EN61000-4-8		Level 4, 30A	Level 4, 30A/m	
	Voltage Dips ar	Voltage Dips and Interruptions		BS EN/EN61000-4-11			>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods	
OTHERS								
MTBF	1213.4 K hrs m	in. Telcordia S	SR-332 (Bellcore)	; 212.1K h	rs min. MIL-HI	DBK-217F (25°C)	
DIMENSION (L*W*H)	199*99*41m	199*99*41mm						
PACKING	1Kg;12pcs/13K	g/0.72 CUFT						

NOTE

- 1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature.

 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.

- 2. Tolerance: includes set up tolerance, line regulation and load regulation.

 4. Derating may be need under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.

 5. The ambient temperature derating of 3.5°C/1000m with fanless models and 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

 6. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)
- 7. RCM is on voluntary basis and meets relevant IEC or AS/NZS standards complying with AS/NZS 4417.1.
- 8. MOPP is suitable for 100-240Vac input only.
- * Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx




■ Block Diagram PFC fosc: 65KHz PWM fosc: 80KHz O RS+ **EMI FILTER** RECTIFIERS POWER -○ +Vo PFC Input **SWITCHING** CIRCUIT - o -Vo RECTIFIERS FILTER CONSTANT CURRENT ∘ RS-FG O DETECTION ACTIVE START PWM & PFC ODC OK CIRCUIT CONTROL CIRCUIT 0.V.P. REMOTE O R.C CONTROL AUX **POWER** ■ Derating Curve Suitable for 100/110/115/120Vac System Suitable for 220/230/240/277Vac System (85~135Vac) (180~305Vac) Please refer to Function Manual of peak power 200 Please refer to Function Manual of peak power 150 LOAD (%) 120 LOAD (%) 100 90 80 100 60 40 40 85 (HORIZONTAL) -30 0 10 45 50 60 70 85 (HORIZONTAL) -40 -30 0 10 60 70 AMBIENT TEMPERATURE (°C) AMBIENT TEMPERATURE (°C) Note: Below 100Vac @-30°C there may be a restart situation within 3 seconds after power-on ■ Output Derating vs Input Voltage 100 90 80 LOAD (%) 70 60 50 40 85 100 220 230 240 277 305 INPUT VOLTAGE (Vac) 60Hz

■ Funtion Manual

1. Peak Power

$$\begin{aligned} P_{\mathrm{av}} &= \frac{P_{\mathrm{pk}} \; x \; t + P_{\mathrm{npk}} \; x \; \left(T \text{-} t \right)}{T} \; \leqslant \; P_{\mathrm{rated}} \\ Duty &= \frac{t}{T} \; x \; 100\% \; \leqslant \; 35\% \end{aligned}$$

 $t \le 5 \, \text{sec}$

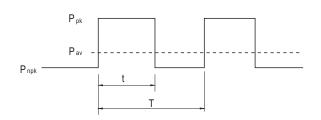

Pav: Average output power (W)
Ppk: Peak output power (W)


 P_{npk} : Non-peak output power(W)

P_{rated}: Rated output power(W)

t : Peak power width(sec)

T: Period(sec)



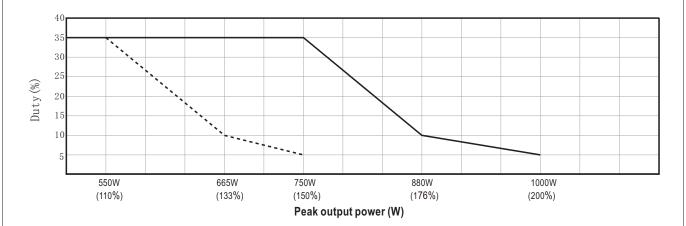

For example (24V model):

$$P_{av} = P_{rated} = 500W$$

$$T \ge \frac{5 \text{ sec}}{5\%} \ge 100 \text{sec}$$

$$P_{_{npk}} \leqslant \, \frac{T \ P_{_{av}} \ \textbf{-} \ t \ P_{_{pk}}}{T \textbf{-} \textbf{t}}$$


Note: When the output voltage is adjusted to the upper limit, the peak power is 150% rated power.



2.Remote Control


The PSU can be turned ON/OFF by using the "Remote Control" function with external switch and auxiliary power.

PSU Vo Status	Between RC-(pin6) and RC+(pin5) on CN1		
POWER ON	Keep 0~0.8Vdc or open		
POWER OFF	Keep 3.3~10Vdc by external voltage		

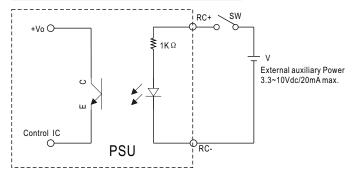

3.Remote Sense

The remote sensing compensates voltage drop on the load wiring up to 0.3Vdc.

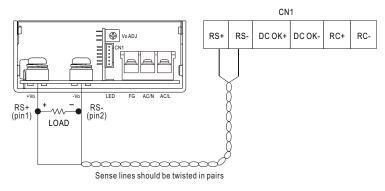


4.DC_OK signal


DC_OK is a collector shorted signal. It is used by an optocoupler in the power supply which indicates the output status of the power supply as exhibited below.


PSU Vo Status	Photo transistor
POWER ON	Conduct(Low impedance)
POWER OFF	Open(High impedance)

Optocoupler Rating(max.) 15Vdc/10mA resistive load

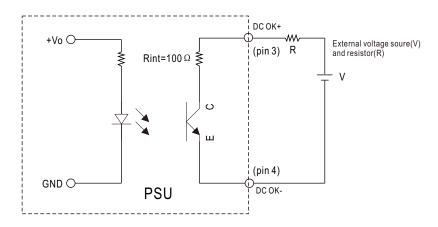

■ Mechanical Specification (Unit: mm, tolerance ± 1mm) Case No.215B 199.0 Bracket (MW'S Order No. PGG2MHS012) Air flow direction ⇒ **Top View** LED **(4)** 3 FG ② AC/N **(4)** 1 AC/L



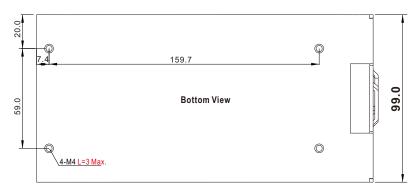

Pin No.	Assignment	Mating Housing	Terminal		
1	RS+				
2	RS-				
3	DC OK+	JS-11242-06	DJS-1125R-06		
4	DC OK-	or equivalent	or equivalent		
5	RC+				
6	RC-				

$\ensuremath{\mathbb{X}}$ AC Input Terminal Pin No. Assignment

	Pin No.	Assignment	Diagram		Screw Size	Maximum mounting torque
	1	AC/N or DC input -Vin		H H H		
Ī	2	AC/L or DC input +Vin			M3.5	10Kgf-cm
	3	FG ±		LJ		




 $\ensuremath{\,\times\,}$ DC Output Terminal Pin No. Assignment

	1, 2 0 0 4 p at 10 11 m at 11							
Pin No.	Assignment	Assignment Diagram		Maximum mounting torque				
5	+Vo	For 5~15V models	M5	401/				
4	-Vo	For 24~60V models	M4	12Kgf-cm				

■ Accessory List

No.		ltem	Quantity
1	Control function interface(CN1) mating wire along with NSP-320 (standard accessory)	50±5mm UL1007 28AWG	1pcs/per model
2	Bracket MW'S Order NO. :PGG2MHS012 (By request accessory,should ordered seperatey)		4pcs/per model (Please refer to Installation Diagram)
3	Terminal cover MW'S Order NO. : PEE4TBC-03 (By request accessory, should ordered seperatey)		1pcs/per model

■ Installation Diagram

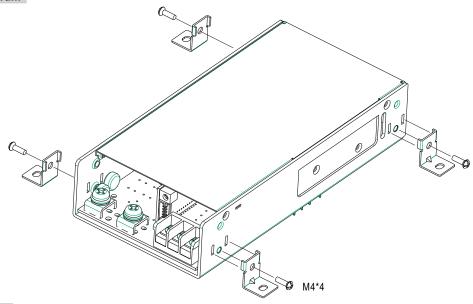

■ Installation Manual

Please refer to : http://www.meanwell.com/manual.html