



TEST REPORT: RPS-65-12

65W Single Output Medical Type

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST
OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 11.40V ~ 13.20V	I/P : 230VAC O/P: MIN LOAD TA : 25°C	CH1: 11.14V ~ 13.67V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 2.0% ~ -2.0%	I/P : 115VAC / 264VAC O/P: FULL / MINLOAD TA= 25°C	V1: 0.36% ~ -0.36%
3	LINE REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 115VAC / 264VAC O/P: FULL LOAD TA : 25°C	V1: 0.00% ~ -0.05%
4	LOAD REGULATION (MAX.)	V1 : 2.0% ~ -2.0%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: 0.36% ~ -0.36%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	TEST< 1.000 %
	RIPPLE & NOISE(Max)	V1 : 120 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25°C	V1 : 46.8 mVp-p

high frequency :


low frequency :

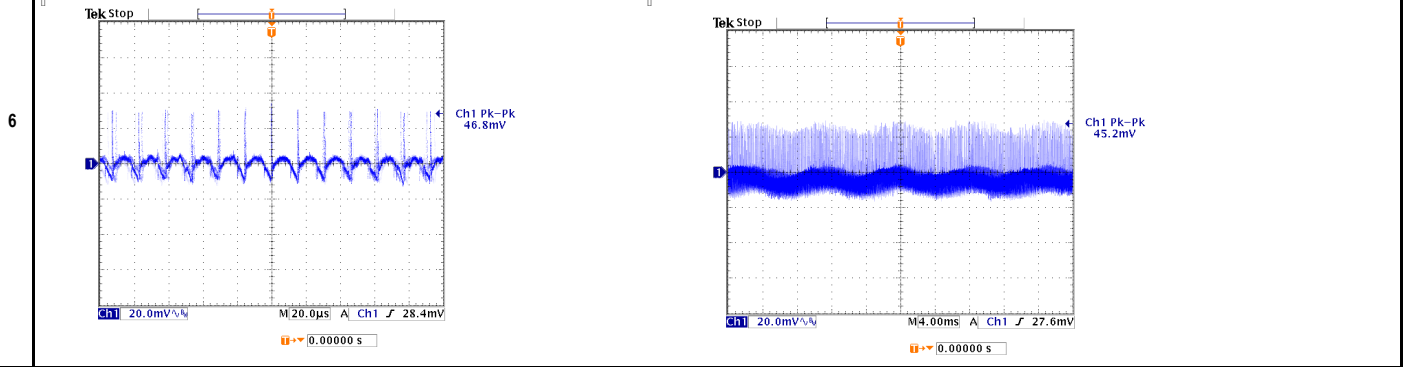

SET UP TIME (MAX.)	230VAC	115VAC	I/P : 230VAC	I/P : 115VAC	230VAC	115VAC
	500ms	500ms	76ms	26ms	76ms	26ms

INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage


INPUT=115VAC/60HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

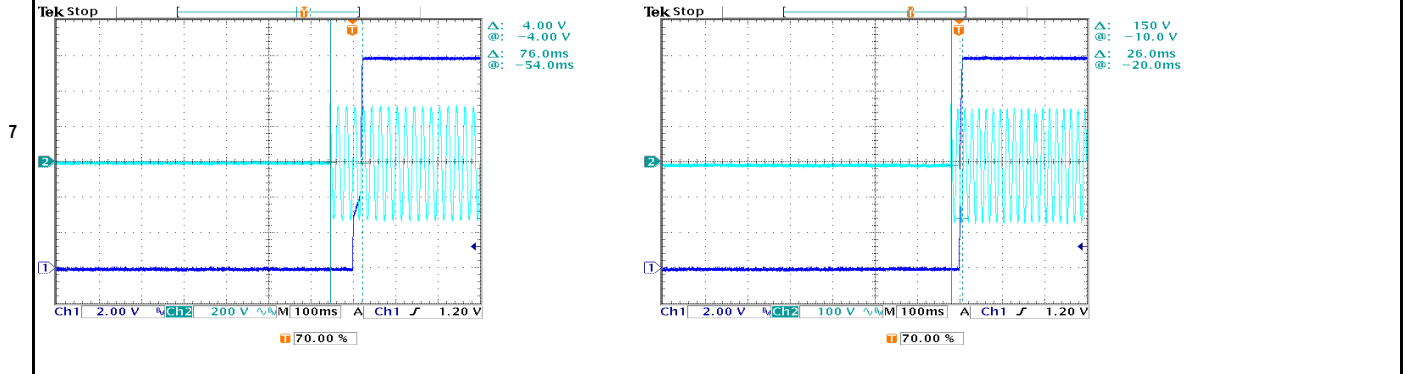


8	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 5.2ms 115VAC : 6.2ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage		
9	HOLD UP TIME (TYP.)	230VAC : 30ms 115VAC : 12ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 62.4ms 115VAC : 12.8ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		
10	DYNAMIC LOAD	V1 : 1200 mVp-p	I/P : 230VAC O/P: (1) Full/Min load 50% duty/120HZ (2) Full/Min load 50% duty/1KHZ TA : 25°C	V1: (1). 418.0mv (2). 344.0mv unit:mVp-p
	FULL /50% LOAD 50%DUTY / 120HZ	FULL /50% LOAD 50%DUTY / 1KHZ		

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC ~ 264VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	65.3VAC ~ 264VAC
			I/P : LOW-LINE = 77VAC HIGH-LINE = 300VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 115VAC ~ 264VAC O/P : FULL-MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	1 / 230VAC 1.5 / 115VAC	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 0.559 / 230VAC I= 1.08 / 115VAC
4	LEAKAGE CURRENT	< 100uA	I/P : 264VAC O/P : MIN LOAD TA : 25°C	L-FG: 84 uA N-FG: 84 uA
5	NO LOAD POWER CONSUMPTION	< 0.10W	I/P : 230VAC O/P : MIN LOAD TA : 25°C	< 0.0493 W
6	EFFICIENCY (TYP.)	88.0%	I/P : 230VAC O/P : FULL LOAD TA : 25°C	88.12 %

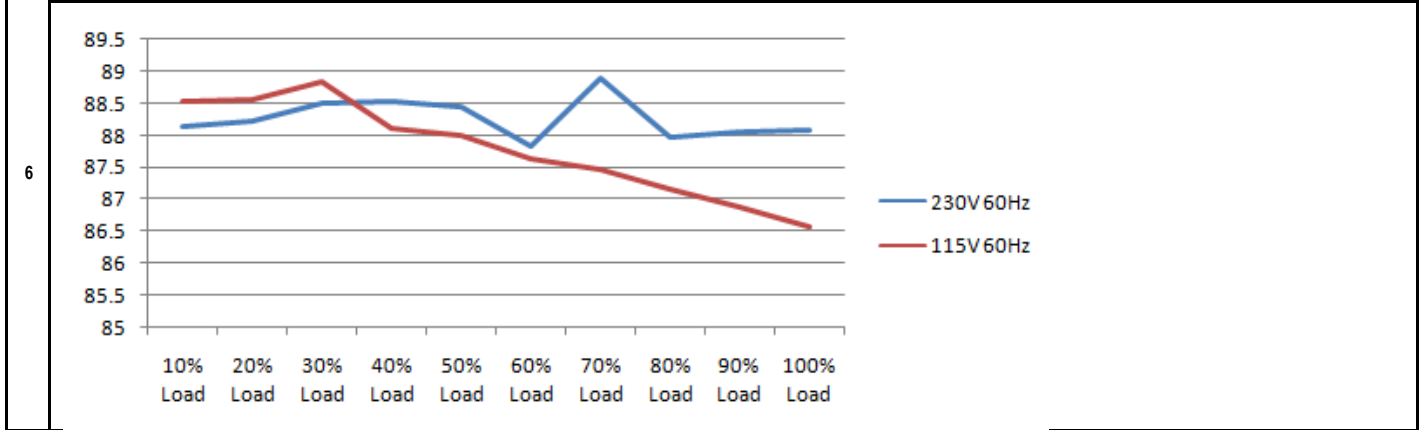

7	INRUSH CURRENT (TYP.)	50A / 230VAC 30A / 115VAC twidh= 0 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 27.30A / 230VAC I= 27.20A / 115VAC
		<p>INPUT=230VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage</p>	<p>INPUT=115VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage</p>	

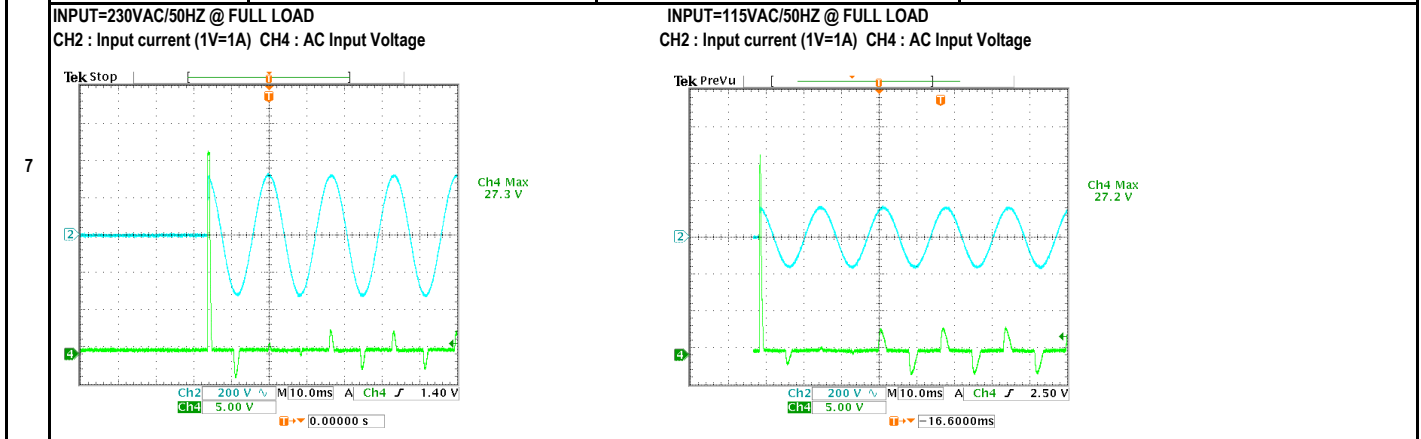

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	115% ~ 150%	I/P: 264VAC I/P: 230VAC I/P: 115VAC O/P: TESTING Ta: 25°C	141.5% 264VAC 144.1% 230VAC 134.1% 115VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	13.80V ~ 16.20V	I/P: 264VAC I/P: 230VAC I/P: 80VAC O/P: MIN LOAD Ta: 25°C	15.34V 264VAC 15.33V 230VAC 15.34V 80VAC Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated : 600V 11.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 267VAC VDS: (1). 548.00V (2). 500.00V (3). 528.00V
2	Input Capacitor	C5 Rated : 100uf 400V	I/P : 267VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1). 344.00V (2). 348.00V (3). 348.00V
3	Control IC	U1 Rated : 28.0V (max) -0.3V (min)	I/P : 267VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)O.V.P (5)Low Line No Load Vo(min) Ta : 25°C	U1 (1). 20.60V (2). 11.90V (3). 21.20V (4). 21.40V (5). 17.80V
4	O/P Diode	D100 Rated : 80V 20.0A	I/P : 267VAC O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1). 57.00V (2). 45.80V (3). 57.20V
5	Clamp Diode	D5 Rated : 800V 2.0A	I/P : 267VAC O/P : (1)Full load continue Ta : 25°C	(1). 484.00V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 4.000KVAC /min	I/P-O/P: 4.400KVAC /min Ta : 25°C	I/P-O/P: 1.53mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25°C/70%RH	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS
2	CONDUCTION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab

3	RADIATION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 MEDICAL AIR: 15KV / Contact: 8KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 MEDICAL INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 MEDICAL L-N:2KV;L/N-PE: 4KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																										
1	TEMPERATURE RISE TEST	MODEL : RPS-65-7.5 1. ROOM AMBIENT BURN-IN : 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 29.6°C 2. HIGH AMBIENT BURN-IN : 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 50.1°C	<table border="1"> <thead> <tr> <th>NO.</th> <th>Positio</th> <th>ROOM AMBIENT</th> <th>29.6°C</th> <th>HIGH AMBIENT Ta:</th> <th>50.1°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>50.5°C</td><td></td><td>68.7°C</td><td></td></tr> <tr><td>2</td><td>LF2</td><td>53.7°C</td><td></td><td>72.7°C</td><td></td></tr> <tr><td>3</td><td>BD1</td><td>83.3°C</td><td></td><td>101.1°C</td><td></td></tr> <tr><td>4</td><td>Q1</td><td>88.8°C</td><td></td><td>106.6°C</td><td></td></tr> <tr><td>5</td><td>C5</td><td>64.0°C</td><td></td><td>82.1°C</td><td></td></tr> <tr><td>6</td><td>C40</td><td>78.5°C</td><td></td><td>96.1°C</td><td></td></tr> <tr><td>7</td><td>T1</td><td>80.9°C</td><td></td><td>98.2°C</td><td></td></tr> <tr><td>8</td><td>D100</td><td>100.9°C</td><td></td><td>117.6°C</td><td></td></tr> <tr><td>9</td><td>D101</td><td>101.8°C</td><td></td><td>117.2°C</td><td></td></tr> <tr><td>10</td><td>C105</td><td>75.1°C</td><td></td><td>94.3°C</td><td></td></tr> <tr><td>11</td><td>C106</td><td>71.9°C</td><td></td><td>91.0°C</td><td></td></tr> <tr><td>12</td><td>C107</td><td>56.3°C</td><td></td><td>74.5°C</td><td></td></tr> <tr><td>13</td><td>L101</td><td>62.0°C</td><td></td><td>79.6°C</td><td></td></tr> <tr><td>14</td><td>U1</td><td>69.9°C</td><td></td><td>87.2°C</td><td></td></tr> </tbody> </table>	NO.	Positio	ROOM AMBIENT	29.6°C	HIGH AMBIENT Ta:	50.1°C	1	LF1	50.5°C		68.7°C		2	LF2	53.7°C		72.7°C		3	BD1	83.3°C		101.1°C		4	Q1	88.8°C		106.6°C		5	C5	64.0°C		82.1°C		6	C40	78.5°C		96.1°C		7	T1	80.9°C		98.2°C		8	D100	100.9°C		117.6°C		9	D101	101.8°C		117.2°C		10	C105	75.1°C		94.3°C		11	C106	71.9°C		91.0°C		12	C107	56.3°C		74.5°C		13	L101	62.0°C		79.6°C		14	U1	69.9°C		87.2°C		
NO.	Positio	ROOM AMBIENT	29.6°C	HIGH AMBIENT Ta:	50.1°C																																																																																									
1	LF1	50.5°C		68.7°C																																																																																										
2	LF2	53.7°C		72.7°C																																																																																										
3	BD1	83.3°C		101.1°C																																																																																										
4	Q1	88.8°C		106.6°C																																																																																										
5	C5	64.0°C		82.1°C																																																																																										
6	C40	78.5°C		96.1°C																																																																																										
7	T1	80.9°C		98.2°C																																																																																										
8	D100	100.9°C		117.6°C																																																																																										
9	D101	101.8°C		117.2°C																																																																																										
10	C105	75.1°C		94.3°C																																																																																										
11	C106	71.9°C		91.0°C																																																																																										
12	C107	56.3°C		74.5°C																																																																																										
13	L101	62.0°C		79.6°C																																																																																										
14	U1	69.9°C		87.2°C																																																																																										
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230VAC O/P : 129% LOAD Ta : 25°C	TEST : OK																																																																																										
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 264VAC / 115VAC O/P : FULL LOAD Ta : -30.0°C	TEST : OK																																																																																										
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C NO DAMAGE	I/P : 272VAC O/P : FULL LOAD Ta : 50°C HUMIDITY= 95.0% RH	TEST : OK																																																																																										
5	TEMPERATURE COEFFICIENT	±0.03% /°C(0~50°C)	I/P : 230VAC O/P : FULL LOAD	±0.0140% /°C(0~50°C)																																																																																										
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		TEST : OK																																																																																										
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C ~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC Full Load AC ON/OFF test turn on 58sec ; turn off 2sec		TEST : OK																																																																																										
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 2G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK																																																																																										



9	CAPACITOR LIFE CYCLE	:SUPPOSE C106 IS THE MOST CRITICAL COMPONENT					
		(1) I/P : 230VAC	O/P : FULL LOAD	Ta= 25.0°C	LIFE TIME	(1).	158118 HRS
		(2) I/P : 230VAC	O/P : FULL LOAD	Ta= 50.0°C	LIFE TIME	(2).	17782.8 HRS
		(3) I/P : 230VAC	O/P : 75% LOAD	Ta= 50.0°C	LIFE TIME	(3).	44588.4 HRS
		(4) I/P : 230VAC	O/P : 50% LOAD	Ta= 50.0°C	LIFE TIME	(4).	158118 HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE : 959.1 KHRS					
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above				30000HRS @ TA 50°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014