



TEST REPORT: GSM160A15

160W AC-DC Reliable Green Medical Adaptor

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test


■ RELIABILITY TEST

ENVIRONMENT TEST




DESIGN VERIFY TEST
OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 5.0% ~ -5.0%	I/P : 100VAC / 264VAC O/P: FULL / MINLOAD TA: 25°C	V1: 0.40% ~ -3.73%
2	LINE REGULATION (MAX.)	V1 : 1.0% ~ -1.0%	I/P : 100VAC / 264VAC O/P: FULL LOAD TA : 25°C	V1: 0.00% ~ -0.07%
3	LOAD REGULATION (MAX.)	V1 : 5.0% ~ -5.0%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: 2.80% ~ -1.37%
4	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	TEST< 2.1 %
	RIPPLE & NOISE(Max)	V1 : 100 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25°C	V1 : 9.6 mVp-p

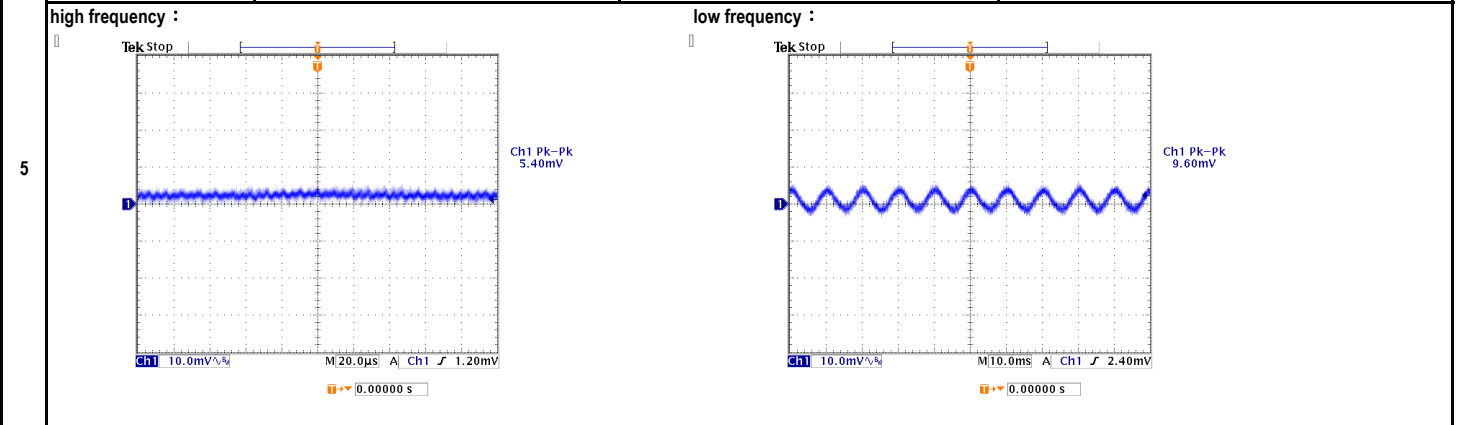


SET UP TIME (MAX.)	230VAC : 2000ms 115VAC : 2500ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 984ms 115VAC : 1040ms
--------------------	------------------------------------	---	-----------------------------------

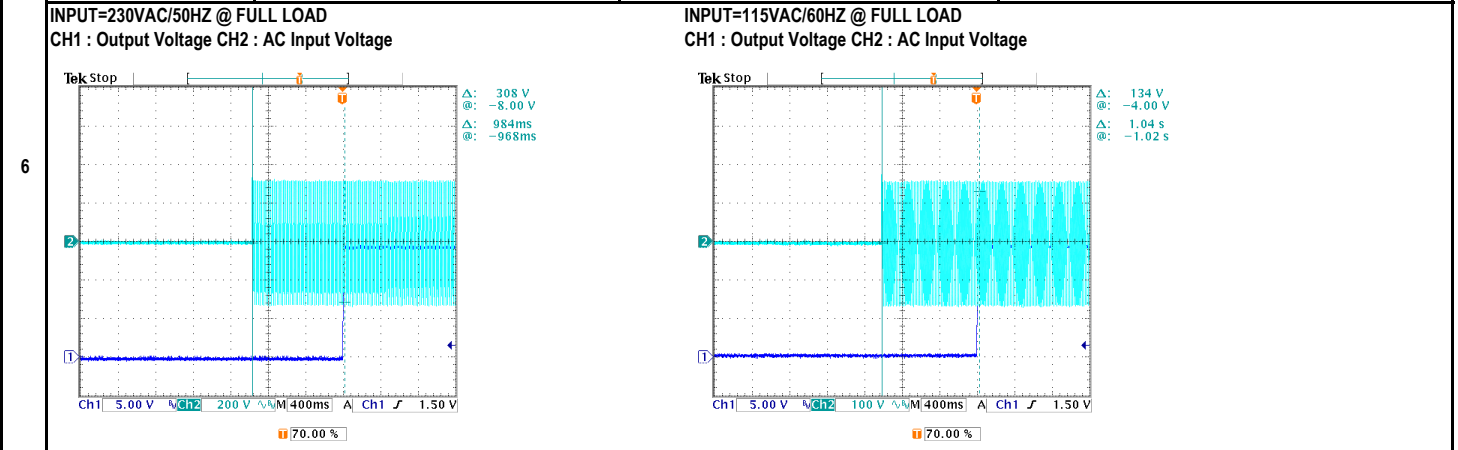





RISE TIME (MAX.)	230VAC	: 50ms	I/P :	230VAC	230VAC	: 14.0ms
	115VAC	: 50ms	I/P :	115VAC	115VAC	: 15.6ms
			O/P:	FULL LOAD		
			TA :	25°C		

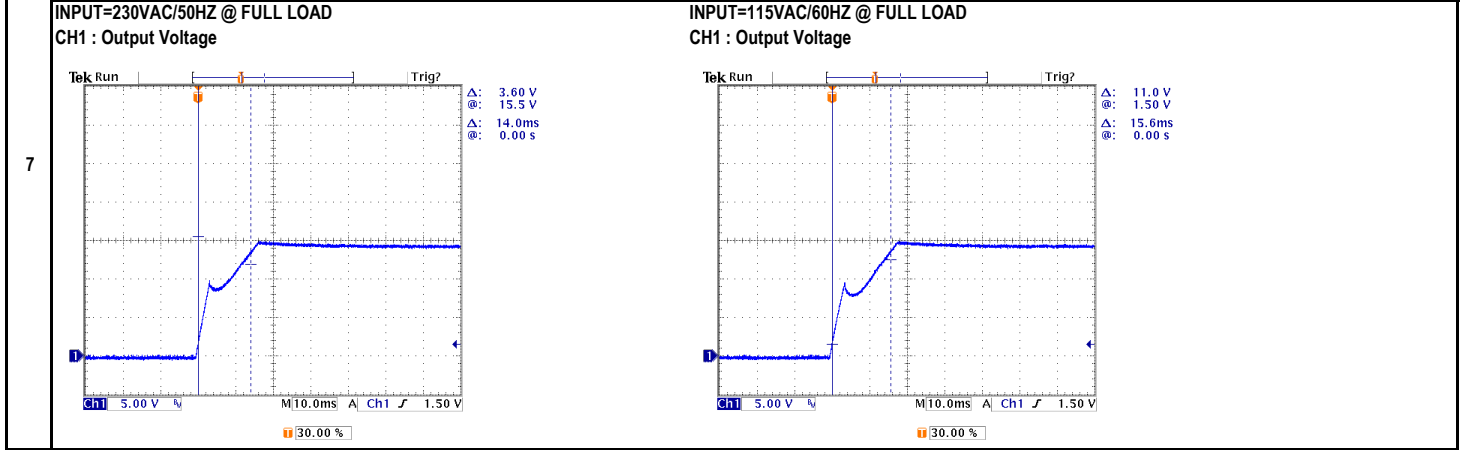

HOLD UP TIME (TYP.)	230VAC	: 24ms	I/P :	230VAC	230VAC	: 24.3ms
	115VAC	: 24ms	I/P :	115VAC	115VAC	: 24.7ms
			O/P:	FULL LOAD		
			TA :	25°C		

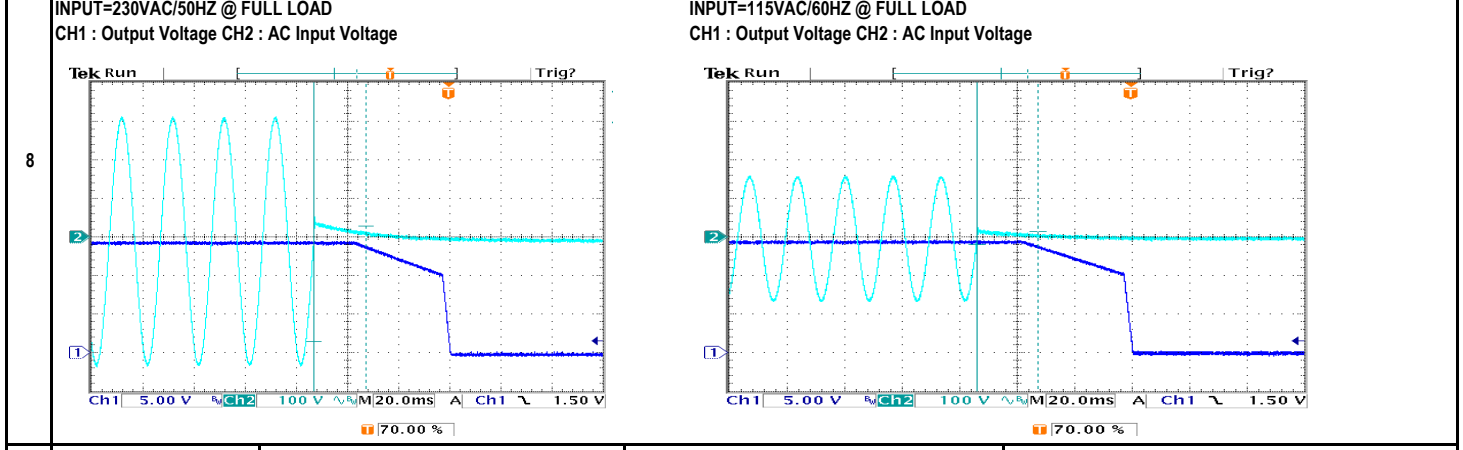


DYNAMIC LOAD	V1 :	1500	mVp-p	I/P :	230VAC	(1).	(2).	unit:mVp-p
				O/P:		800mv	788mv	
			(1)Full/Min load 50%duty/120HZ					
			(2)Full/Min load 50%duty/1KHZ					
			TA :	25°C				

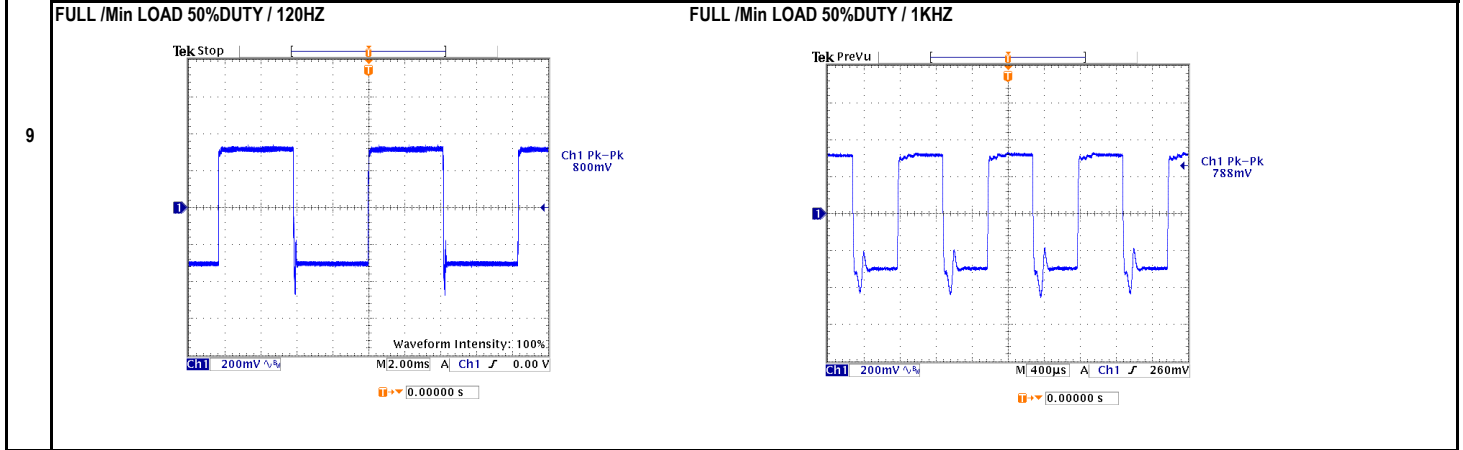





INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC ~ 264VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C I/P : LOW-LINE = 97VAC HIGH-LINE = 300VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	61.0VAC ~ 264VAC TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 100VAC ~ 264VAC O/P : FULL-MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	1.00A / 230VAC 1.85A / 115VAC	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 0.6950A / 230VAC I= 1.3475A / 115VAC
4	LEAKAGE CURRENT	<175uA for earth leakage	I/P : 264VAC O/P : MIN LOAD	L-FG: 129 uA N-FG: 124 uA
		<90uA for touch leakage	TA : 25°C	L-V-: 74 uA N-V-: 73 uA
5	NO LOAD POWER CONSUMPTION	< 0.15W	I/P : 230VAC O/P : MIN LOAD TA : 25°C	< 0.1234 W
6	POWER FACTOR (TYP.)	0.93 / 230VAC	I/P : 230VAC	PF= 0.945 / 230VAC
		0.98 / 115VAC	I/P : 115VAC O/P : FULL LOAD TA : 25°C	PF= 0.994 / 115VAC

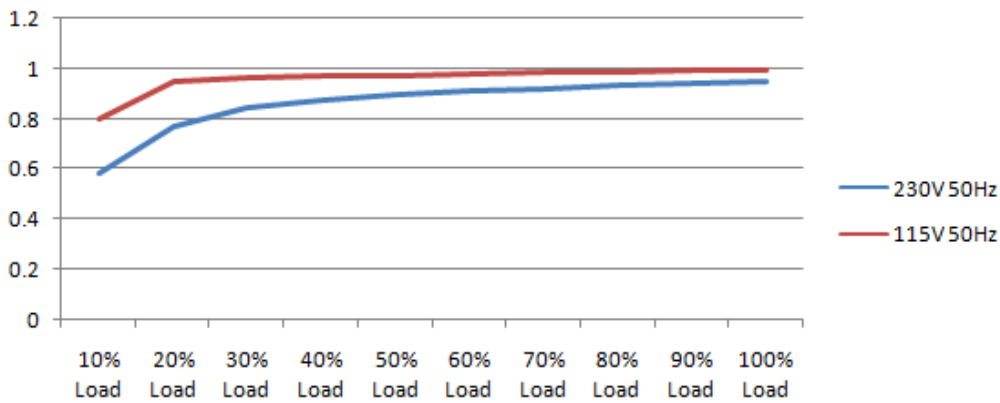

7	EFFICIENCY (TYP.)	91.0%	I/P : 230VAC O/P : FULL LOAD TA : 25°C	91.121 %
---	-------------------	-------	--	----------

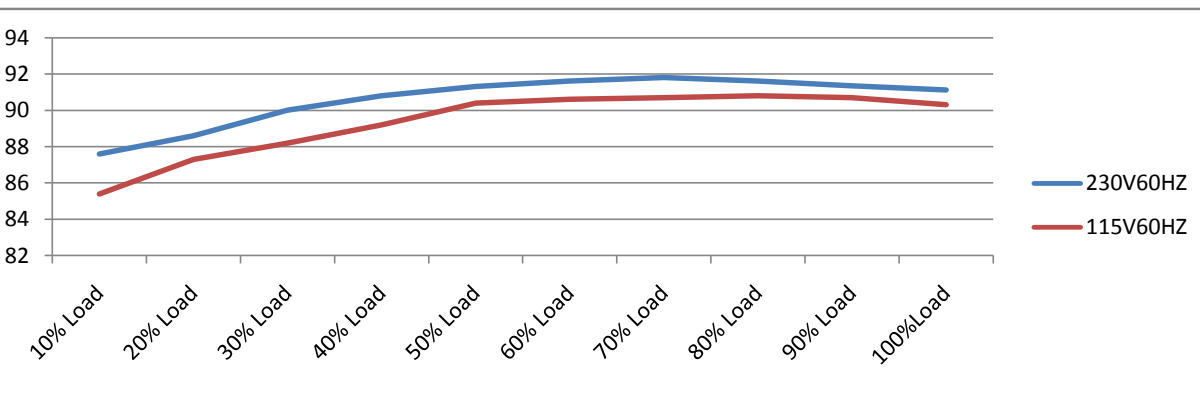

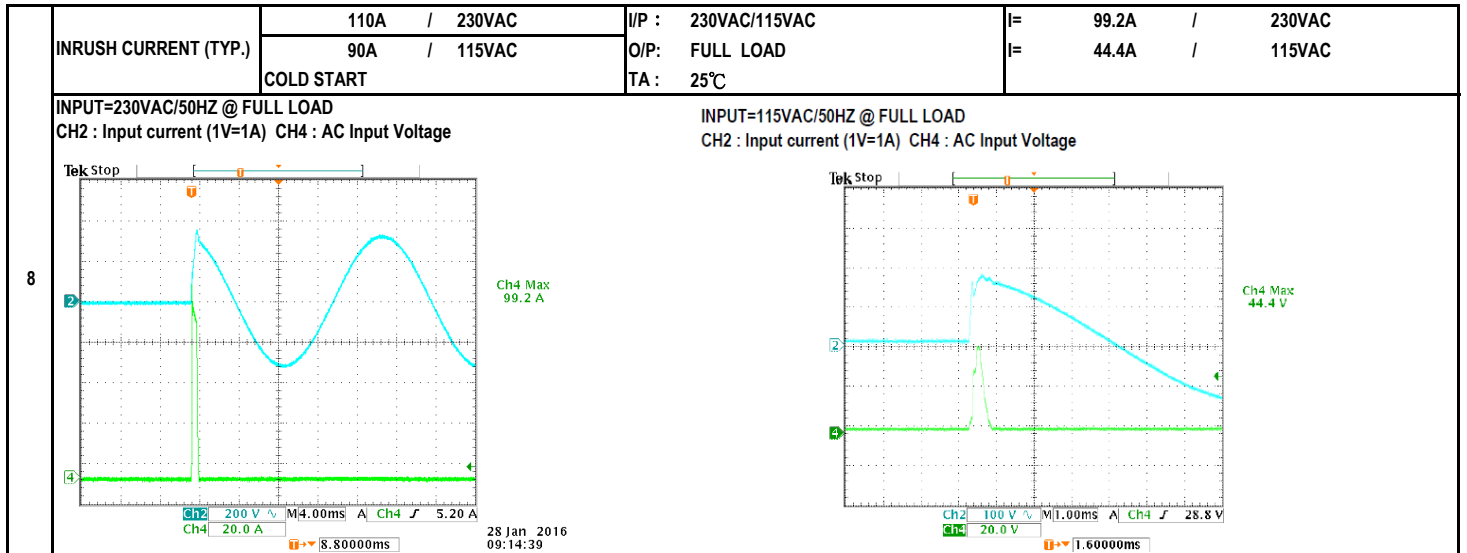

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105% ~ 150%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING TA : 25°C	133.75% 264VAC 132.29% 230VAC 131.77% 100VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	15.75V ~ 20.25V	I/P: 264VAC I/P: 230VAC I/P: 80VAC O/P: MIN LOAD TA : 25°C	17.40V 264VAC 17.40V 230VAC 17.40V 80VAC Shut down Re- power ON
3	OVER TEMPERATURE PROTECTION	Shut down Re- power ON	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Shut down Re- power ON
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q5 Rated : 500V 12.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 267VAC VDS: (1). 454.00V (2). 470.00V (3). 418.00V
1	PWM Power Transistor	Q6 Rated : 500V 12.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 267VAC VDS: (1). 456.00V (2). 454.00V (3). 422.00V
2	O/P Diode (MOSFET)	Q101 Rated : 75V 80A Q102 Rated : 75V 80A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	Q101 Q102 VDS : VDS : (1). 41.60V 40.20V (2). 12.80V 18.60V (3). 40.40V 36.80V



3	Input Capacitor	C5 Rated : 150uf 420V	I/P : 267VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1). 414.00V (2). 406.00V (3). 402.00V
4	Control IC	U1 Rated : 38V (max) -0.4V (min) U101 Rated : 26V (max) -0.3V (min)	I/P : 267VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)O.V.P (5)Low Line No Load Vo(min) Ta : 25°C	U1 U101 (1). 26.40V 12.50V (2). 20.00V 0.98V (3). 20.20V 8.64V (4). 25.40V 16.10V (5). 25.80V 13.50V
5	PFC Power Transistor	Q1 Rated : 600V 16.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 267VAC VDS: (1). 554.00V (2). 544.00V (3). 460.00V
6	PFC Diode	D1 Rated : 600V 9.0A	I/P : 267VAC I/P : O/P : (1)Full Load Turn on (2) Output Short (3)Dynamic Load Full/Min Load 90%Duty/5KHz (4)Dynamic Load Full/Min Load 50%Duty/120Hz Ta : 25°C	267VAC (1). 434.00V (2). 430.00V (3). 434.00V (4). 432.00V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 4.000KVAC /min I/P-FG : 2.000KVAC /min O/P-FG : 0.500KVAC /min	I/P-O/P: 4.400KVAC /min I/P-FG: 2.400KVAC /min O/P-FG: 0.600KVAC /min Ta : 25°C	I/P-O/P: 1.19mA I/P-FG: 0.83mA O/P-FG: 1.23mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25°C/70%RH	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS
2	CONDUCTION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 AIR: 15KV / Contact: 8KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	EN61000-4-5 L-N: 1KV;L/N-PE: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A



RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	TEMPERATURE RISE TEST	MODEL : GSM160A12			
		1. ROOM AMBIENT BURN-IN : 1.0hrs			
		IP: 230VAC O/P: 100% LOAD TA= 22.9°C			
		2. HIGH AMBIENT BURN-IN : 1.0hrs			
		IP: 230VAC O/P: 100% LOAD TA= 40.0°C			
			NO. Position ROOM AMBIENT 22.9°C HIGH AMBIENT Ta: 40.0°C		
			1 LF1 52.8°C 70.3°C		
			2 LF2 54.2°C 71.7°C		
			3 L2 55.3°C 73.1°C		
			4 L1 55.9°C 73.6°C		
			5 C5 57.5°C 75.1°C		
			6 BD1 56.7°C 74.1°C		
			7 Q1 56.9°C 74.0°C		
			8 D1 57.4°C 74.8°C		
			9 Q6 57.7°C 75.1°C		
			10 Q5 58.4°C 75.7°C		
			11 RTH2 58.4°C 76.2°C		
			12 T1 65.5°C 83.0°C		
			13 C81 58.1°C 75.3°C		
	14 Q101 63.9°C 81.2°C				
	15 Q102 62.8°C 80.1°C				
	16 C101 66.2°C 83.2°C				
	17 C102 62.8°C 80.0°C				
	18 LF101 66.5°C 83.8°C				
	19 U1 59.5°C 77.0°C				
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230VAC O/P : 117.39% LOAD Ta : 25°C	TEST : OK	
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 264VAC / 100VAC O/P : FULL LOAD Ta : -30.0°C	TEST : OK	
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 40°C NO DAMAGE	I/P : 272VAC O/P : FULL LOAD Ta : 40°C HUMIDITY= 95.0% RH	TEST : OK	
5	TEMPERATURE COEFFICIENT	±0.03% /(0°C~50°C)	I/P : 230VAC O/P : FULL LOAD	±0.0101% /(0°C~50°C)	
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		TEST : OK	
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C ~ +45°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC Full Load AC ON/OFF test turn on 58sec ; turn off 2sec		TEST : OK	
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 2G (5) Test Time : 60 min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK	



9	CAPACITOR LIFE CYCLE	:SUPPOSE C101 IS THE MOST CRITICAL COMPONENT					
		(1) I/P : 230VAC	O/P : FULL LOAD	Ta= 25.0°C	LIFE TIME	(1).	97384.5 HRS
		(2) I/P : 230VAC	O/P : FULL LOAD	Ta= 40.0°C	LIFE TIME	(2).	34654.5 HRS
		(3) I/P : 230VAC	O/P : 75% LOAD	Ta= 40.0°C	LIFE TIME	(3).	88357.5 HRS
		(4) I/P : 230VAC	O/P : 50% LOAD	Ta= 40.0°C	LIFE TIME	(4).	173119.5 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 2200.0K hrs min. Telcordia SR-332 (Bellcore) ; 239.4K hrs min. MIL-HDBK-217F (25 °C)					
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 40°C					

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014