


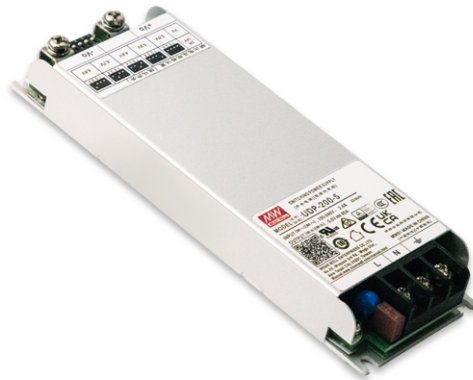

Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Low profile: 19mm
- High efficiency up to 92%
- Built-in active PFC function
- Fanless design, cooling by free air convection
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Output voltage adjustable: DIP switch
- Redundant function(option)
- Operating altitude up to 5000 meters (Note 9)
- Conformal coating
- LED indicator for power on
- 3 years warranty

Applications

- LED signage display
- Moving sign
- LED channel letter
- LED TV wall


GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

The UDP-200 series is a 200W LED display power solution. The ultra-low-profile design allows the sign module to be slim in height and weight. It greatly simplifies the delivery and installation processes. Thanks to its high efficiency and energy-saving performance, the series delivers effective energy savings. It is suitable for LED signage displays, moving signs, LED channel letters, LED TV walls, etc.

Model Encoding

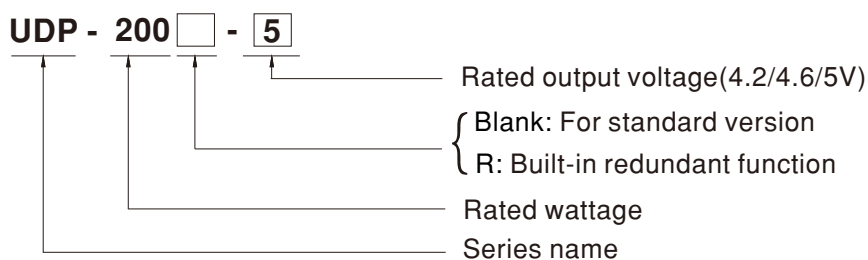

Type	Description	Note
Blank	For standard version	In Stock
R	Built-in redundant function.	In Stock



200W Single Output with PFC Function


UDP-200 series

SPECIFICATION	UDP-200□-4.2	UDP-200 □-4.6	UDP-200□-5
OUTPUT			
DC VOLTAGE	4.2V	4.6V	5V
RATED CURRENT	40A	40A	40A
CURRENT RANGE	0~40A	0~40A	0~40A
RATED POWER	168W	184W	200W
RIPPLE & NOISE(max.) Note.2	200mVp-p	200mVp-p	200mVp-p
VOLTAGE ADJ.RANGE	3.8~4.2V	4.2~4.6V	4.6~5.0V
VOLTAGE TOLERANCE Note.3	±2.0%	±2.0%	±2.0%
LINE REGULATION	±0.5%	±0.5%	±0.5%
LOAD REGULATION	±1.0%	±1.0%	±1.0%
SETUP, RISE TIME	1000ms, 100ms/230VAC, 1500ms, 100ms/115VAC		
HOLD UP TIME (Typ.)	10ms/230VAC 10ms/115VAC		
INTPUT			
VOLTAGE RANGE Note.4	90 ~ 264VAC 127 ~ 370VDC		
FREQUENCY RANGE	47 ~ 63Hz		
POWER FACTOR (Typ.)	PF≥0.97/115VAC PF≥0.95/230VAC at full load		
EFFICIENCY (Typ.)	90%	91%	92%
AC CURRENT (Typ.)	2.4A/115VAC 1.2A/230VAC		
INRUSH CURRENT (Typ.)	Cold start : 30A/115VAC 60A/230VAC		
LEAKAGE CURRENT	<1.0mA / 240VAC		
PROTECTION			
OVERLOAD	105~180% rated output power		
	Protection type : Hiccup mode, recovers automatically after fault condition is removed		
SHORT CIRCUIT	Protection type : Hiccup mode, recovers automatically after fault condition is removed		
OVER VOLTAGE	4.6 ~ 6.3V	5 ~ 6.7V	5.6 ~ 7.5V
	Protection type : Hiccup mode, recovers automatically after fault condition is removed		
OVER TEMPERATURE	Protection type : Hiccup mode, recovers automatically after fault condition is removed		
FUNCTION			
REDUNDANT(Optional)	For parallel connection protection: For parallel applications, when one PSU cannot work, the other one will be automatically enabled. This prevents system crash and enhances system reliability.		
ENVIRONMENT			
WORKING TEMP.	-40 ~ +70℃ (Refer to “OUTPUT LOAD vs TEMPERATURE”)		
WORKING HUMIDITY	20 ~ 95% RH non-condensing		
STORAGE TEMP., HUMIDITY	-40 ~ +85℃ , 10 ~ 95% RH		
TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)		
VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes		




SAFETY & EMC			
SAFETY STANDARDS	UL 62368-1, BS EN/EN62368-1,GB 4943.1, EAC TP TC 004 approved		
WITHSTAND VOLTAGE	I/P-O/P:3.0kVAC I/P-FG:2kVAC O/P-FG:0.5kVAC		
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC/25℃ / 70%RH		
EMC EMISSION	Parameter	Standard	Test Level / Note
	Conducted	BS EN/EN55032(CISPR32),GB/T 9254.1	Class B
	Radiated	BS EN/EN55032(CISPR32),GB/T 9254.1	Class B
	Harmonic Current	BS EN/EN61000-3-2(IEC61000-3-2),GB17625.1	Class D
	Voltage Flicker	BS EN/EN61000-3-3(IEC61000-3-3)	-----
EMC IMMUNITY	BS EN/EN55035(CISPR35)		
	Parameter	Standard	Test Level / Note
	ESD	BS EN/EN61000-4-2	Level 3, 8kV air ; Level 2, 4kV contact
	Radiated	BS EN/EN61000-4-3	Level 2, 3V/m
	EFT / Burst	BS EN/EN61000-4-4	Level 2, 1kV
	Surge	BS EN/EN61000-4-5	Level 4, 2kV/Line-Line 4kV/Line-Earth
	Conducted	BS EN/EN61000-4-6	Level 2, 3V
	Magnetic Field	BS EN/EN61000-4-8	Level 2, 3A/m
	Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods
	OTHERS		
MTBF	1992.9 K hrs min. Telcordia SR-332 (Bellcore) ; 201.1K hrs min. MIL-HDBK-217F (25℃)		
DIMENSION	150*50*19mm (L*W*H)		
PACKING	0.24kg; 48pcs/ 13kg/1.03CUFT		
NOTE			
1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : line regulation and load regulation. 4. Derating may be needed under low input voltages. Please check the static characteristics for more details. 5. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. 6. Dynamic load testing shall be performed with a minimum load of 10%. 7. R type efficiency slightly less than the Blank type, according to the actual measurement. 8. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to “EMI testing of component power supplies.” (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 9. The ambient temperature derating of 3.5℃ /1000m is needed for operating altitude greater than 2000m(6500ft). ⌘ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx			

Block Diagram

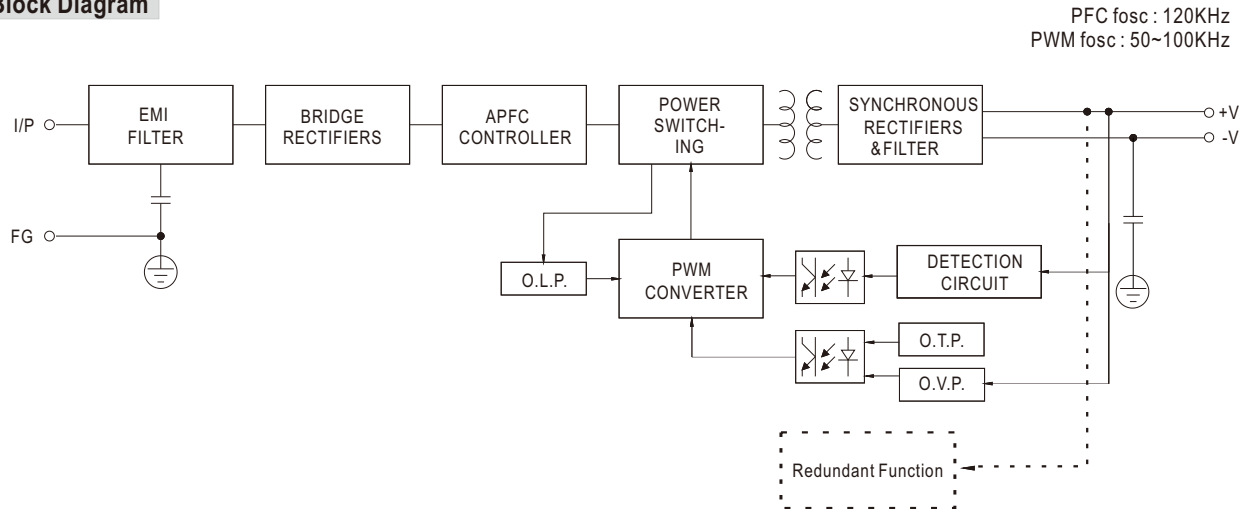


OUTPUT LOAD vs TEMPERATURE

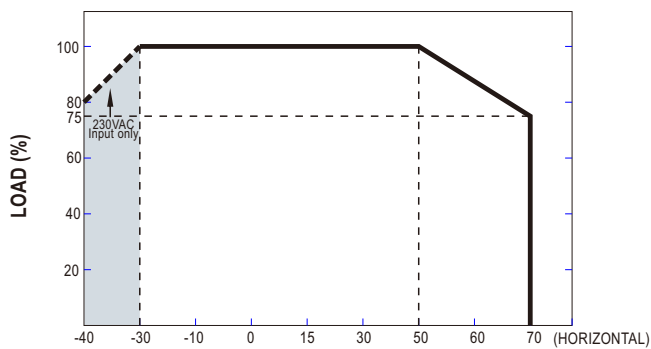

AMBIENT TEMPERATURE, Ta (°C)

Note: Below 110Vac @ -30°C there may be a restart situation within 5 seconds after power-on

STATIC CHARACTERISTIC

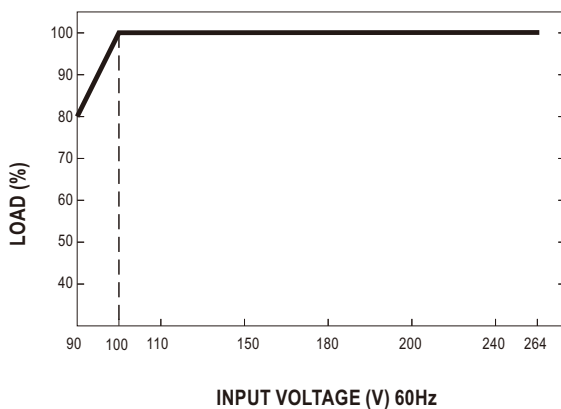


Mechanical Specification

CASE NO.: 314

Unit:mm

Tolerance:±1

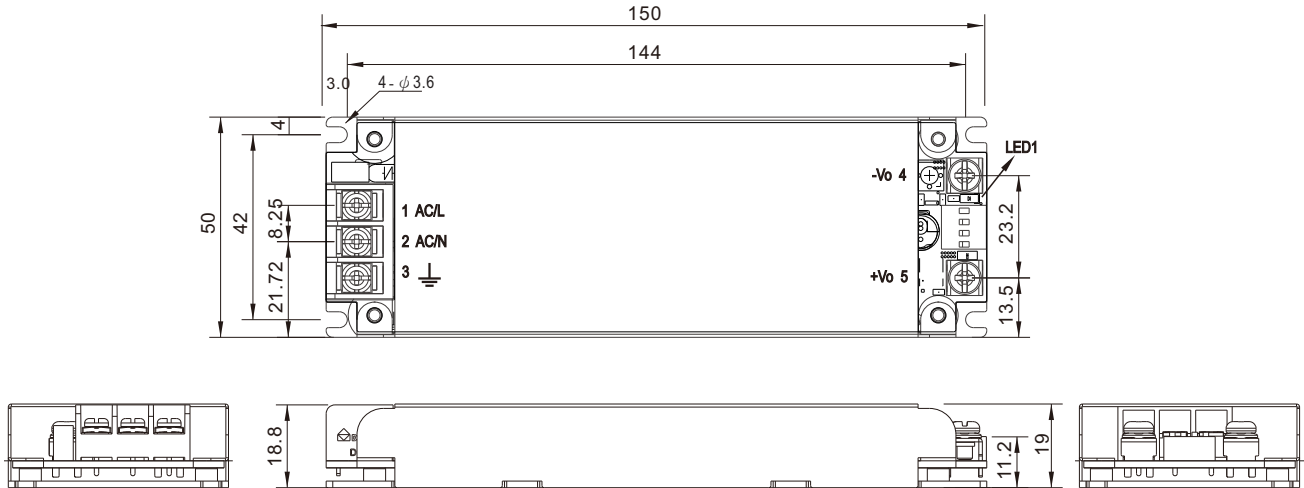

AC Input Terminal(TB1) pin NO. Assignment

Pin No.	Assignment	Terminal	Mounting torque
1	AC/L	(FUCON) FB825-22NCR-03P	4-5Kgf.cm
2	AC/N		
3	⏏		

DC Output Terminal(TB2,TB3) pin NO. Assignment

Pin No.	Assignment	Terminal	Mounting torque
4	-Vo	(MW) K14-20A(H)	6-8Kgf.cm
5	+Vo		


Function manual

1.The output voltage can be adjusted

DIP Switch Settings	UDP-200-4.2	UDP-200-4.6	UDP-200-5	
 ON OFF Factory default	4.2V	4.6V	5.0V	Fixed output
 ON OFF	4.1V	4.5V	4.9V	Fixed output
 ON OFF	4.0V	4.4V	4.8V	Fixed output
 ON OFF	3.9V	4.3V	4.7V	Fixed output
 ON OFF	3.8V	4.2V	4.6V	Fixed output
Other Setting	X			Incorrect Mode Not recommend

2.Redundant function

- UDP-200R is built-in redundant function and can be connected 2 units in parallel .
- When in parallel operation the maximum load should not be greater than the rated power of any PSU.

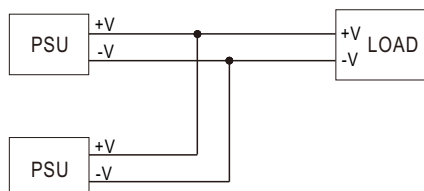

■ Installation**1. Operate with additional aluminum plate**

In order to meet the "Derating Curve" and "Static Characteristics", the UDP-200 series must be mounted on an aluminum plate (or cabinet of equivalent dimensions) at its bottom side. The recommended dimensions of the aluminum plate are shown below. To optimize thermal performance, the aluminum plate shall feature a flat, smooth surface (or be applied with thermal grease), and the UDP-200 series must be firmly mounted at the center of this aluminum plate.

